


## Uponor RS spacer RS2-RS2 l=5mm

**1046750**

- Made of tin plated-brass
- Spacer to connect RS base parts of equal dimensions.

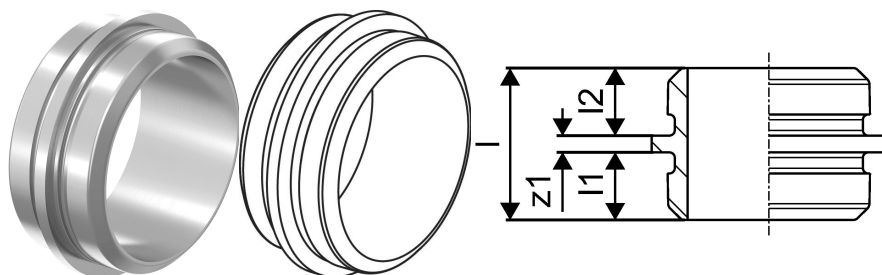

### Application information Uponor RS spacer

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS spacer RS2-RS2 l=5mm

1046750

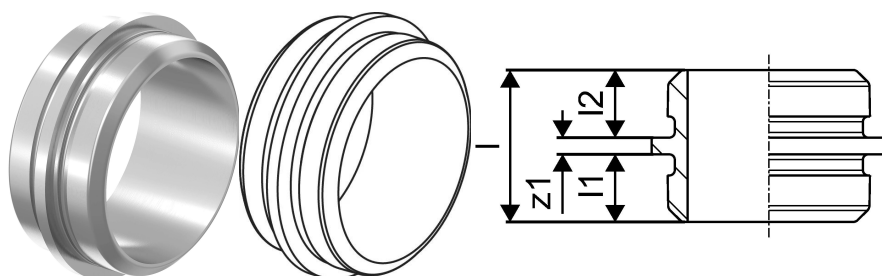

### Technical data

Item no EAN	4021598113077
Item no GTIN	04021598113077
Item no VVS	045458205
RSK no.	1877798
Item no NRF	5079085
Item no LVI	1720636
Item (unit of measurement)	pce
Length (l)	45 mm
Length (l1)	20 mm
Length (l2)	20 mm
Packaging Quantity 1	1
Packaging Quantity 4	480
Packaging GTIN PL1	06414905483020
Packaging GTIN PL4	06414905483037
Item Unit Length	65
Item Unit Height	46
Item Unit Weight	0,355
Item Unit Width	65

### Documents

Page with all documents

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)