


## Uponor RS spacer RS3-RS3 l=5mm

1046751

- Made of tin plated-brass
- Spacer to connect RS base parts of equal dimensions.

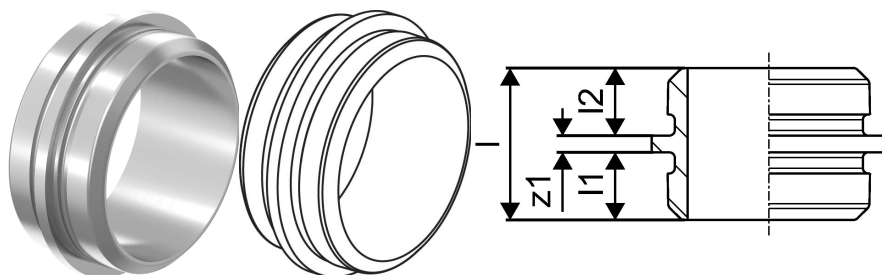

### Application information Uponor RS spacer

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS spacer RS3-RS3 l=5mm

1046751

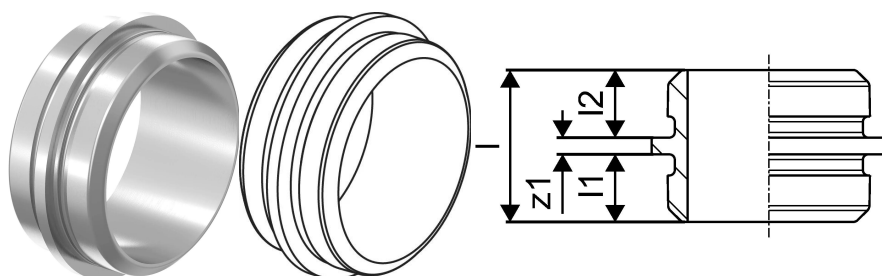

### Technical data

Item no EAN	4021598113084
Item no GTIN	04021598113084
Item no VVS	045458305
RSK no.	1877799
Item no NRF	5079086
Item no LVI	1720637
Item (unit of measurement)	pce
Length (l)	45 mm
Length (l1)	20 mm
Length (l2)	20 mm
Packaging Quantity 1	1
Packaging Quantity 4	240
Packaging GTIN PL1	06414905460489
Packaging GTIN PL4	06414905493357
Item Unit Length	98
Item Unit Height	45
Item Unit Weight	0,568
Item Unit Width	98

### Documents

Page with all documents

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)