


Uponor S-Press adapter male thread 50-R2"MT

1046906

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

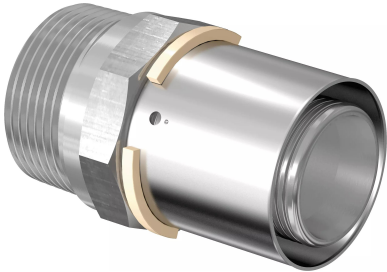

Application information Uponor S-Press adapter male thread

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- if not different mentioned:
Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
E.g.
- DVGW
- AENOR

Uponor S-Press adapter male thread 50-R2"MT

1046906



Technical data

Item no EAN	4021598114036
Item no GTIN	04021598114036
Item no VVS	045481054
Item (unit of measurement)	pce
Length (l)	84 mm
Length (l1)	24 mm
Length (l2)	38 mm
Z-measurement d	50 mm
Packaging Quantity 1	3
Packaging Quantity 4	576
Packaging GTIN PL1	06414905401512
Packaging GTIN PL4	06414905401529
Item Unit Length	67
Item Unit Height	86
Item Unit Weight	0,759
Item Unit Width	67

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com