


Uponor S-Press adapter female thread 50-Rp1 1/2"FT

1046907

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

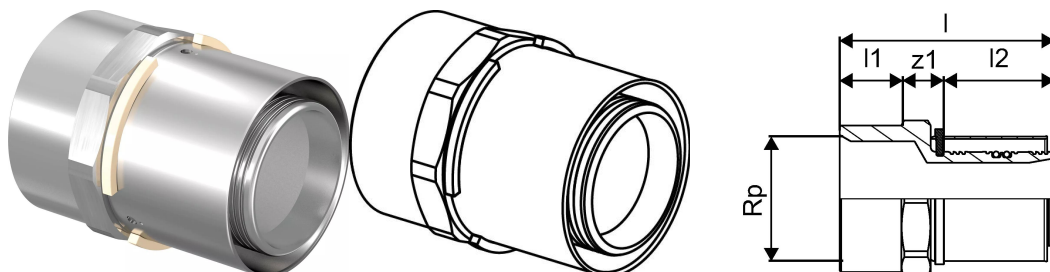

Application information Uponor S-Press adapter female thread

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
E.g.
 - DVGW
 - AENOR

Uponor S-Press adapter female thread 50-Rp1 1/2"FT

1046907

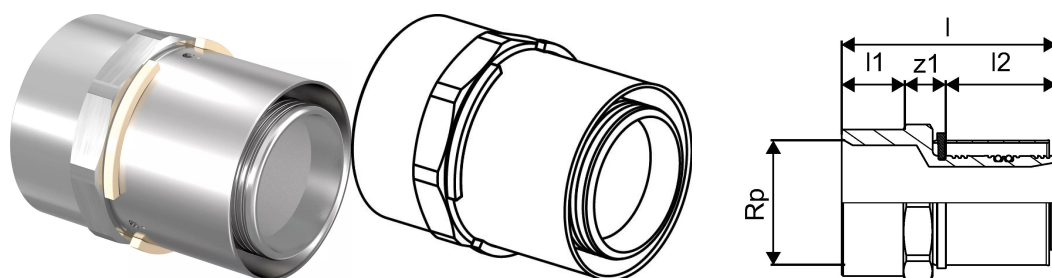

Technical data

Item no EAN	4021598114043
Item no GTIN	04021598114043
Item no VVS	045482445
Item no NRF	5071554
Item (unit of measurement)	pce
Female thread Rp	1 1/2 inch
Length (l)	73 mm
Length (l1)	21 mm
Length (l2)	38 mm
Packaging Quantity 1	3
Packaging Quantity 4	1152
Packaging GTIN PL1	06414905481088
Packaging GTIN PL4	06414905481095
Item Unit Length	73
Item Unit Height	55
Item Unit Weight	0,369
Item Unit Width	55

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com