


Uponor S-Press elbow 45deg 40-40

1046913

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

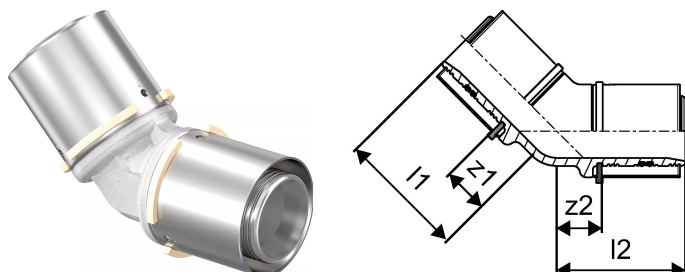

Application information Uponor S-Press elbow 45deg

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press elbow 45deg 40-40

1046913

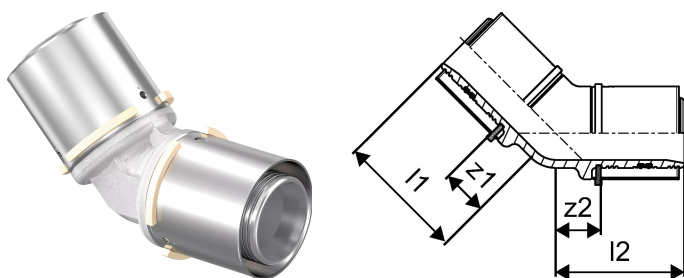

Technical data

Item no EAN 4021598114104

Item no GTIN 04021598114104

Item no VVS 045473040

Item (unit of measurement) pce

Length (l1) 59 mm

Length (l2) 59 mm

Z-measurement z2 21 mm

Packaging Quantity 1 5

Packaging Quantity 4 500

Packaging GTIN PL1 06414905401598

Packaging GTIN PL4 0641490555291

Item Unit Length 50

Item Unit Height 115

Item Unit Weight 0,41

Item Unit Width 50

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com