

## Uponor S-Press tee reducer 40-25-32

**1046917**

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code



### Application information Uponor S-Press tee reducer

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- if not different mentioned:  
Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.  
E.g.
  - DVGW
  - AENOR

## Uponor S-Press tee reducer 40-25-32

1046917

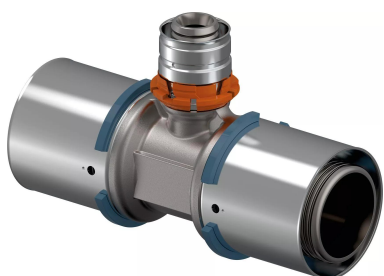

### Technical data

Item no EAN	4021598114142
Item no GTIN	04021598114142
Item no VVS	045476416
Item (unit of measurement)	pce
Length (l1)	61 mm
Length (l2)	60 mm
Length (l3)	53 mm
Z-measurement z2	30 mm
Z-measurement z3	23 mm
Packaging Quantity 1	5
Packaging Quantity 4	500
Packaging GTIN PL1	06414905460601
Packaging GTIN PL4	0641490555321
Item Unit Length	112
Item Unit Height	48
Item Unit Weight	0,44
Item Unit Width	84

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)