


Uponor S-Press tee reducer 40-32-40

1046920

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

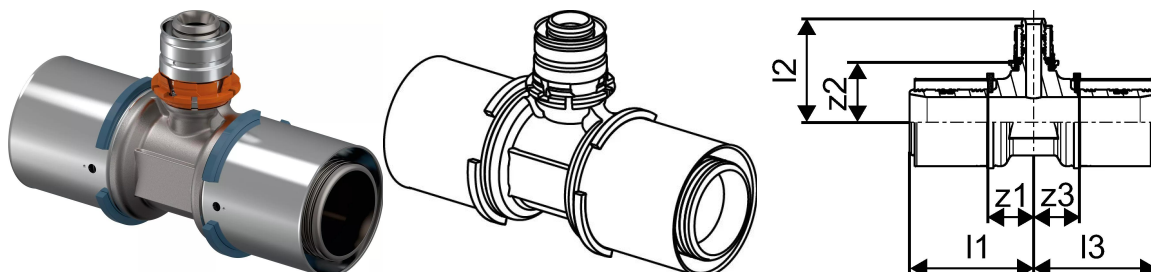

Application information Uponor S-Press tee reducer

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

Uponor S-Press tee reducer 40-32-40

1046920

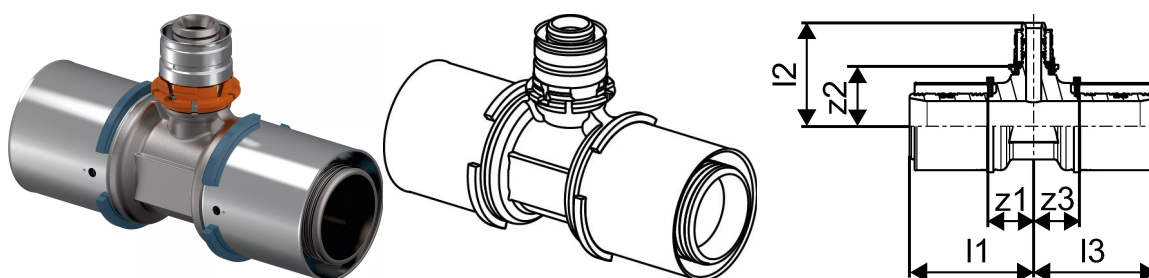

Technical data

Item no EAN	4021598114173
Item no GTIN	04021598114173
Item no VVS	045476420
Item (unit of measurement)	pce
Length (l1)	65 mm
Length (l2)	60 mm
Length (l3)	65 mm
Z-measurement z2	30 mm
Z-measurement z3	27 mm
Packaging Quantity 1	5
Packaging Quantity 4	400
Packaging GTIN PL1	06414905460632
Packaging GTIN PL4	06414905493449
Item Unit Length	132
Item Unit Height	52
Item Unit Weight	0,547
Item Unit Width	82

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com