


Uponor S-Press tee reducer 50-25-40

1046924

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

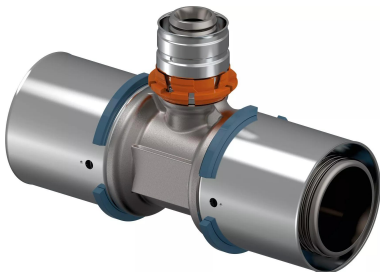

Application information Uponor S-Press tee reducer

Specification

- with fixed press sleeve
- stop ring
- test safety

Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- if not different mentioned:
Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
E.g.
 - DVGW
 - AENOR

Uponor S-Press tee reducer 50-25-40

1046924

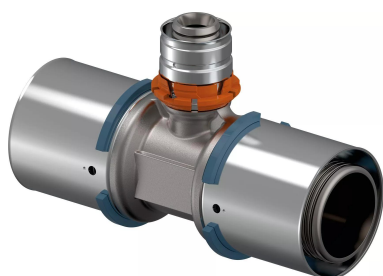

Technical data

Item no EAN	4021598114210
Item no GTIN	04021598114210
Item no VVS	045476436
Item (unit of measurement)	pce
Length (l1)	61 mm
Length (l2)	65 mm
Length (l3)	61 mm
Z-measurement z2	35 mm
Z-measurement z3	23 mm
Packaging Quantity 1	3
Packaging Quantity 4	300
Packaging GTIN PL1	06414905460656
Packaging GTIN PL4	06414905555345
Item Unit Length	122
Item Unit Height	44
Item Unit Weight	0,615
Item Unit Width	93

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com