


## Uponor S-Press adapter swivel nut 40-G1 1/2"SN

**1046937**

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code
- Releasable screw connector for connection to on-wall fittings, filters and shut-off valves
- Thread acc. to EN ISO 228-1.

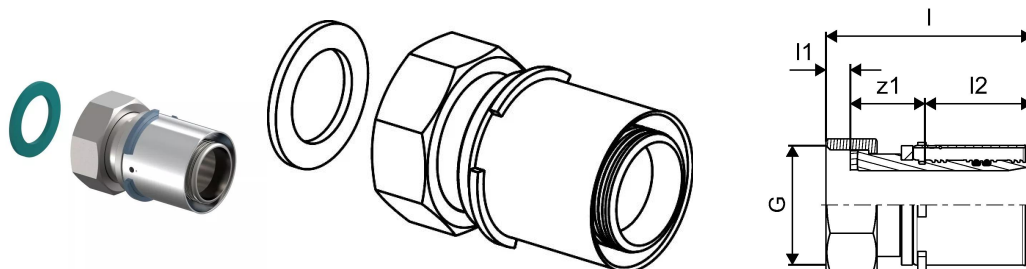

### Application information Uponor S-Press adapter swivel nut

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

## Uponor S-Press adapter swivel nut 40-G1 1/2"SN

1046937

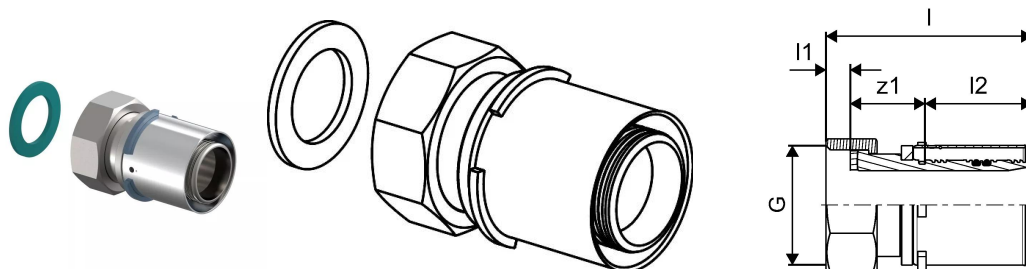

### Technical data

Item no EAN	4021598114333
Item no GTIN	04021598114333
Item no VVS	045483042
Item (unit of measurement)	pce
Length (l)	77 mm
Length (l1)	10 mm
Length (l2)	38 mm
Packaging Quantity 1	5
Packaging Quantity 4	960
Packaging GTIN PL1	06414905401734
Packaging GTIN PL4	06414905401741
Item Unit Length	74
Item Unit Height	55
Item Unit Weight	0,358
Item Unit Width	55

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

www.uponor.com