


Uponor RS adapter S-Press 50-RS2

1046941

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts.

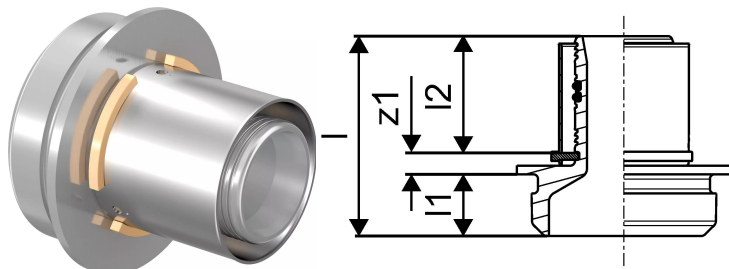

Application information Uponor RS adapter S-Press

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter S-Press 50-RS2

1046941

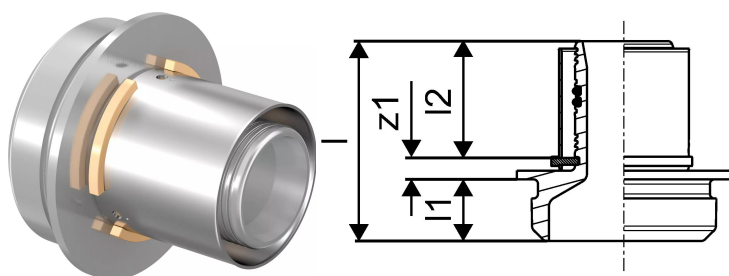

Technical data

Item no EAN	4021598114371
Item no GTIN	04021598114371
Item no VVS	045450050
Item no NRF	5071232
Item (unit of measurement)	pce
Length (l)	65 mm
Length (l1)	20 mm
Length (l2)	38 mm
Packaging Quantity 1	1
Packaging Quantity 4	480
Packaging GTIN PL1	06414905401796
Packaging GTIN PL4	06414905401802
Item Unit Length	67
Item Unit Height	69
Item Unit Weight	0,409
Item Unit Width	69

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com