


## Uponor Wipex RS adapter PN6 DR 75x6,8 RS2

**1047014**

- RS = unique modular fitting connection
- 6 bar, SDR 11
- DR = dezincification resistance brass

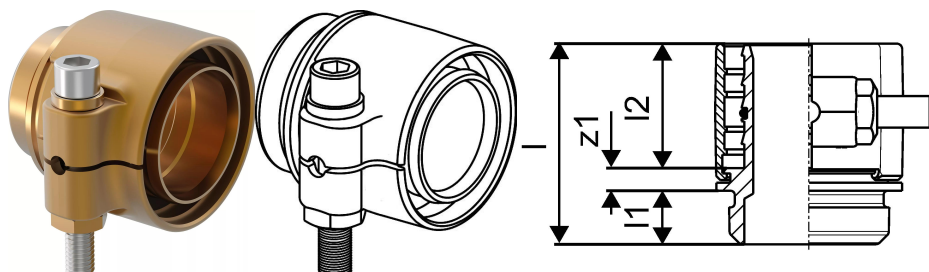

### Application information Uponor Wipex RS adapter PN6

#### Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

#### Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

#### Certification

- Approvals should be checked by local responsible person

## Uponor Wipex RS adapter PN6 DR 75x6,8 RS2

1047014

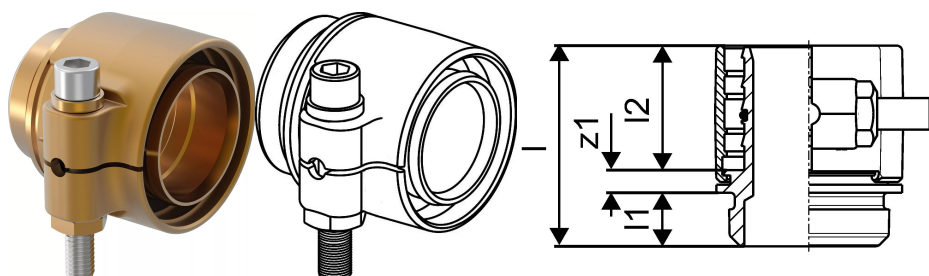

### Technical data

Item no EAN	4021598114807
Item no GTIN	04021598114807
Item (unit of measurement)	pce
Length (l)	84 mm
Length (l1)	46 mm
Length (l2)	20 mm
Packaging Quantity 1	1
Packaging Quantity 4	240
Packaging GTIN PL1	06414905402151
Packaging GTIN PL4	06414905402168
Item Unit Length	87
Item Unit Height	103
Item Unit Weight	1,27
Item Unit Width	103

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)