


Uponor Wipex RS adapter PN10 DR 90x12,3 RS3

1047019

- RS = unique modular fitting connection
- 10 bar, SDR 7,4
- DR = dezincification resistance brass

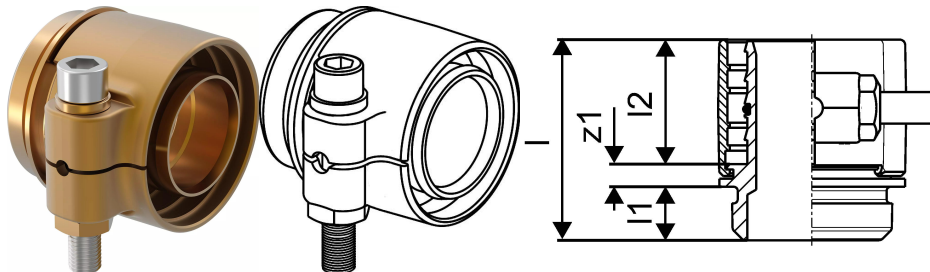

Application information Uponor Wipex RS adapter PN10

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Wipex RS adapter PN10 DR 90x12,3 RS3

1047019

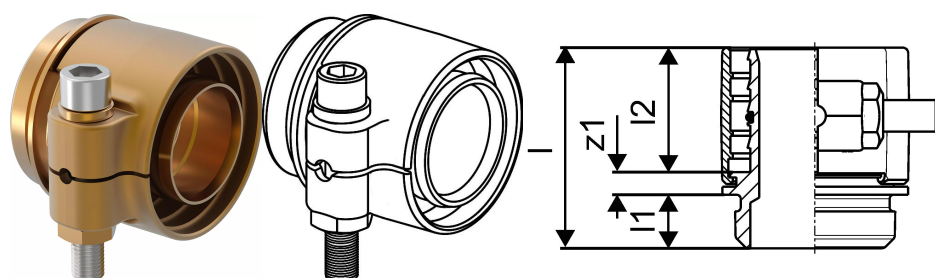

Technical data

Item no EAN	4021598114852
Item no GTIN	04021598114852
Item (unit of measurement)	pce
Length (l)	92 mm
Length (l1)	20 mm
Length (l2)	59 mm
Packaging Quantity 1	1
Packaging Quantity 4	180
Packaging GTIN PL1	06414905402236
Packaging GTIN PL4	06414905402243
Item Unit Length	120
Item Unit Height	97
Item Unit Weight	2,225
Item Unit Width	108

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com