


Uponor RS adapter PL Q&E 25-RS2

1047021

- RS
- Positive listed brass
- Uponor Q&E Ring must be ordered separately

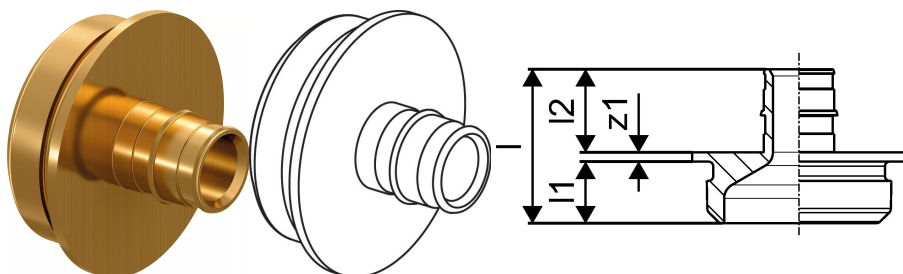

Application information Uponor RS adapter PL Q&E

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter PL Q&E 25-RS2

1047021

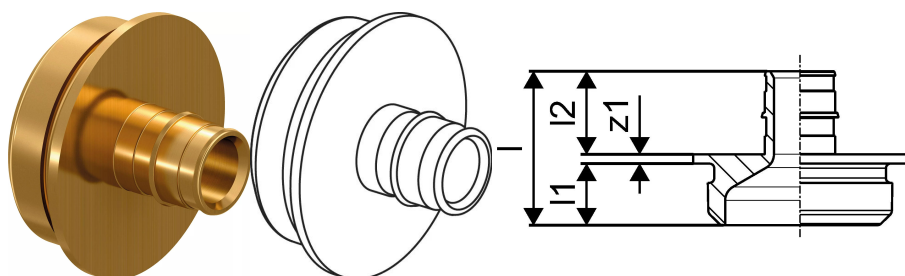

Technical data

Item no EAN	4021598114876
Item no GTIN	04021598114876
Item (unit of measurement)	pce
Length (l)	50 mm
Length (l1)	20 mm
Length (l2)	27 mm
Packaging Quantity 1	1
Packaging Quantity 4	480
Packaging GTIN PL1	06414905402250
Packaging GTIN PL4	06414905402267
Item Unit Length	73
Item Unit Height	54
Item Unit Weight	0,33
Item Unit Width	73

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com