


## Uponor RS flange adapter RS3-DN80 (PN6)

**1059400**

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts
- Flange PN6/PN16 acc. to EN 1092-3
- Bolt circle with 4/8 holes.

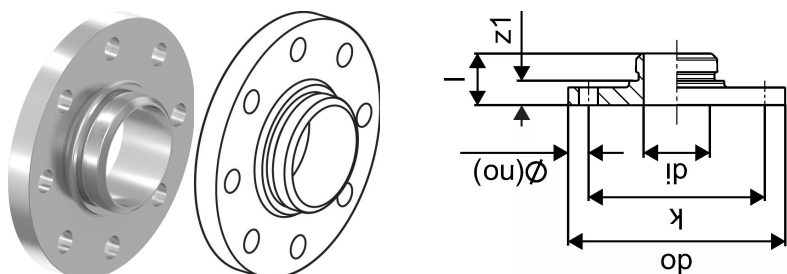

### Application information Uponor RS flange adapter

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS flange adapter RS3-DN80 (PN6)

1059400

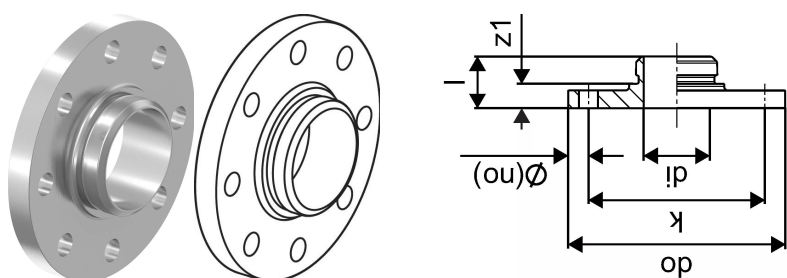

### Technical data

Item no EAN	4021598121720
Item no GTIN	04021598121720
RSK no.	1897885
Item (unit of measurement)	pce
Length (l)	38 mm
Z-measurement k	150 mm
Packaging Quantity 1	1
Packaging Quantity 4	90
Packaging GTIN PL1	06414905481408
Packaging GTIN PL4	06414905481415
Item Unit Length	189
Item Unit Height	40
Item Unit Weight	1,6
Item Unit Width	189

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)