


Uponor RS flange adapter RS3-DN100 (PN6)

1059401

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts
- Flange PN6/PN16 acc. to EN 1092-3
- Bolt circle with 4/8 holes.

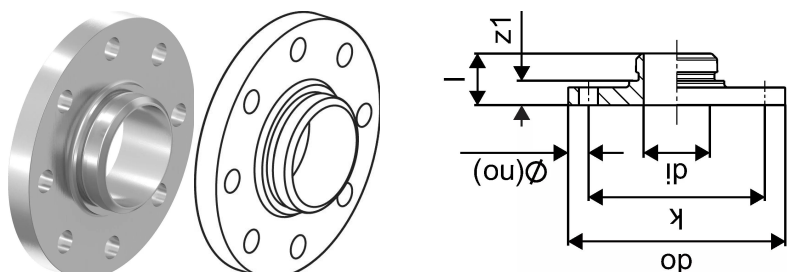

Application information Uponor RS flange adapter

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS flange adapter RS3-DN100 (PN6)

1059401



Technical data

Item no EAN	4021598121737
Item no GTIN	04021598121737
RSK no.	1897886
Item (unit of measurement)	pce
Length (l)	41 mm
Z-measurement k	170 mm
Packaging Quantity 1	1
Packaging Quantity 4	90
Packaging GTIN PL1	06414905481422
Packaging GTIN PL4	06414905481439
Item Unit Length	226
Item Unit Height	43
Item Unit Weight	4,092
Item Unit Width	226

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com