


## Uponor RS adapter female thread Rp1/2"FT-RS2

1059403

- Made of tin-plated brass.
- fits to all RS2 or RS3 base parts

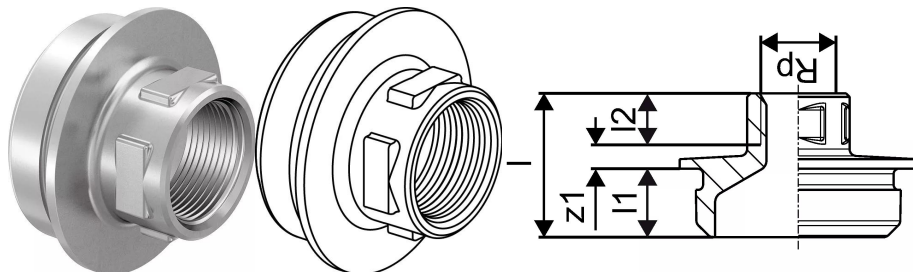

### Application information Uponor RS adapter female thread

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS adapter female thread Rp1/2"FT-RS2

1059403

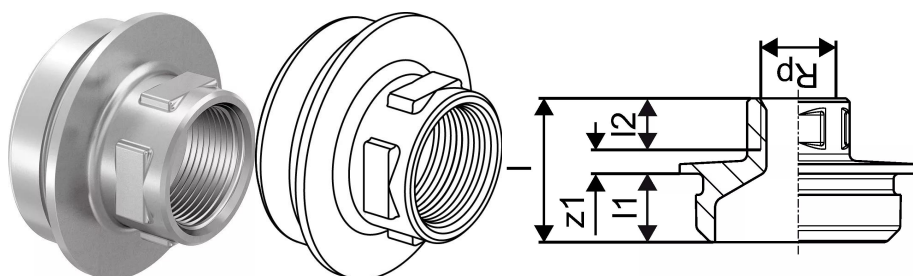

### Technical data

Item no EAN	4021598121751
Item no GTIN	04021598121751
Item no VVS	045452163
RSK no.	1897888
Item (unit of measurement)	pce
Female thread Rp	1/2 inch
Length (l)	42 mm
Length (l1)	20 mm
Length (l2)	15 mm
Packaging Quantity 1	1
Packaging Quantity 4	480
Packaging GTIN PL1	06414905463596
Packaging GTIN PL4	06414905495764
Item Unit Length	65
Item Unit Height	45
Item Unit Weight	0,346
Item Unit Width	65

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)