


## Uponor Uni Pipe PLUS white S 25x2,5 5m

1059574

- bar
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier

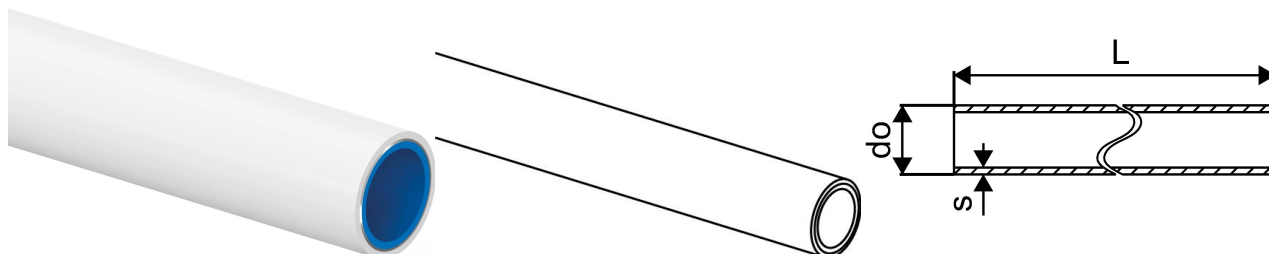

### Application information Uponor Uni Pipe PLUS white S

#### Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

#### Application


- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

## Uponor Uni Pipe PLUS white S 25x2,5 5m

1059574

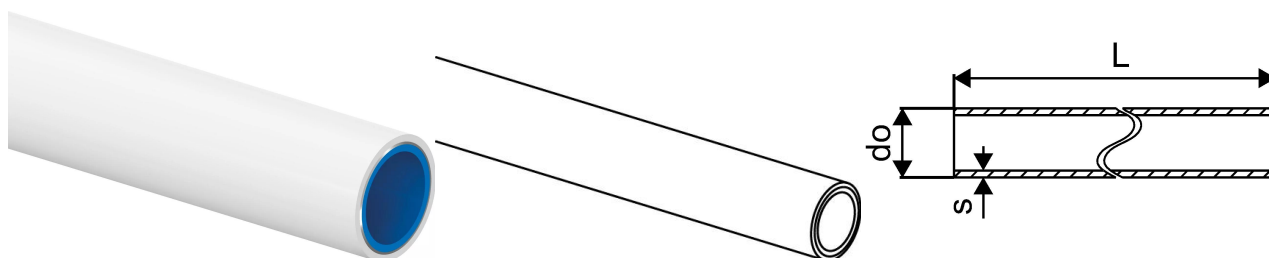

### Technical data

Item no EAN	4021598121225
Item no GTIN	04021598121225
Item no VVS	087480125
RSK no.	2004934
Item no NRF	5072099
Item no LVI	1720135
Item (unit of measurement)	m
Packaging Quantity 1	5
Packaging Quantity 4	50
Packaging Quantity 4	2550
Packaging GTIN PL1	06414905412020
Packaging GTIN PL2	06414905635344
Packaging GTIN PL4	06414905635559
Item Unit Length	1000
Item Unit Height	25
Item Unit Weight	0,264
Item Unit Width	25

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)