


## Uponor S-Press PLUS elbow 32-32

1070526

- Made of tin-plated DR brass

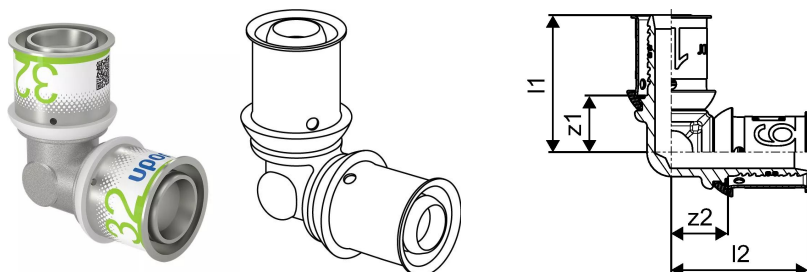

### Application information Uponor S-Press PLUS elbow

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS elbow 32-32

1070526

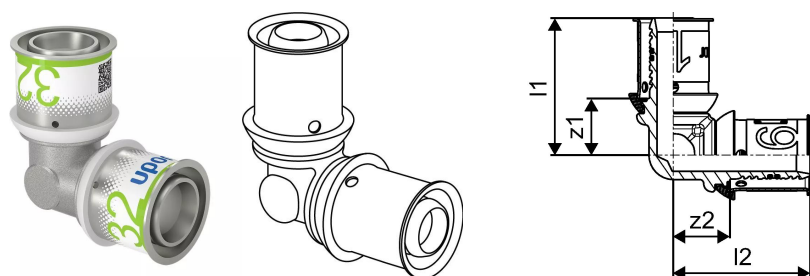

### Technical data

Item no EAN	6414905218462
Item no GTIN	06414905218462
Item no VVS	045470132
RSK no.	1896532
Item no NRF	5114453
Item no LVI	1720192
Item (unit of measurement)	pce
Length (l1)	51 mm
Length (l2)	51 mm
Z-measurement z2	23 mm
Packaging Quantity 1	5
Packaging Quantity 3	20
Packaging Quantity 4	960
Packaging GTIN PL1	06414905290239
Packaging GTIN PL3	06414905424191
Packaging GTIN PL4	06414905290246
Item Unit Length	71
Item Unit Height	71
Item Unit Weight	0,242
Item Unit Width	39

### Documents

Page with all documents



Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)