


## Uponor S-Press PLUS tee 20-20-20

1070561

- Made of tin-plated DR brass

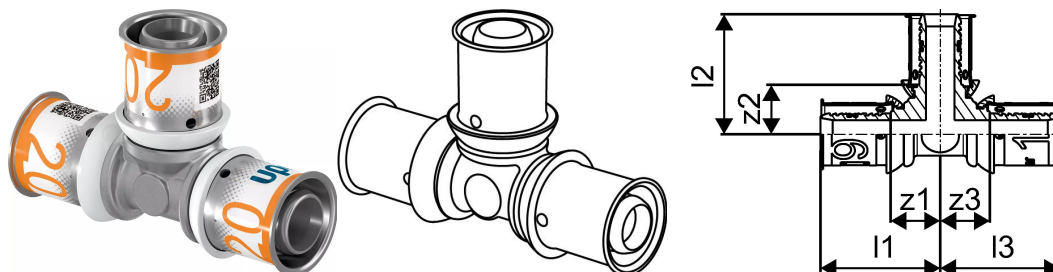

### Application information Uponor S-Press PLUS tee

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS tee 20-20-20

1070561

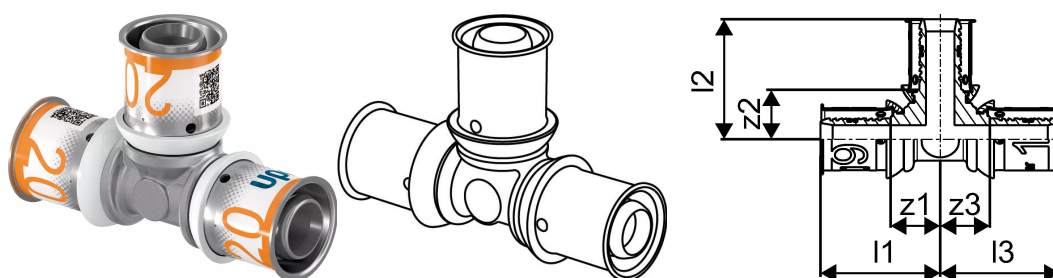

### Technical data

Item no EAN	6414905218813
Item no GTIN	06414905218813
Item no VVS	045476020
RSK no.	1808007
Item no NRF	5114487
Item no LVI	1720745
Item (unit of measurement)	pce
Length (l1)	37 mm
Length (l2)	37 mm
Length (l3)	37 mm
Z-measurement z2	16 mm
Z-measurement z3	16 mm
Packaging Quantity 1	10
Packaging Quantity 3	80
Packaging Quantity 4	1920
Packaging GTIN PL1	06414905282999
Packaging GTIN PL3	06414905635528
Packaging GTIN PL4	06414905283019
Item Unit Length	75
Item Unit Height	50
Item Unit Weight	0,116
Item Unit Width	26

### Documents

Page with all documents

[www.uponor.com](http://www.uponor.com)