


Uponor S-Press PLUS tee reducer 25-20-16

1070575

- Made of tin-plated DR brass

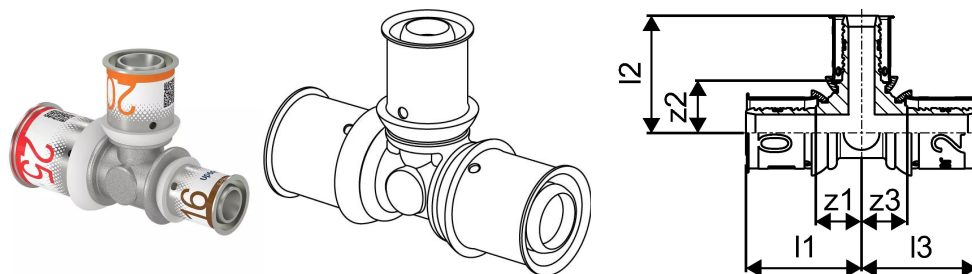

Application information Uponor S-Press PLUS tee reducer

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS tee reducer 25-20-16

1070575

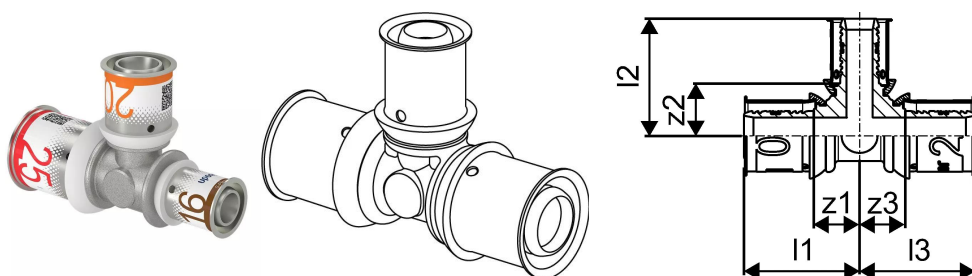

Technical data

Item no EAN	6414905218950
Item no GTIN	06414905218950
Item no VVS	045476335
RSK no.	1808019
Item no NRF	5114501
Item no LVI	1720757
Item (unit of measurement)	pce
Length (l1)	44 mm
Length (l2)	40 mm
Length (l3)	36 mm
Z-measurement z2	19 mm
Z-measurement z3	17 mm
Packaging Quantity 1	5
Packaging Quantity 3	40
Packaging Quantity 4	1920
Packaging GTIN PL1	06414905295791
Packaging GTIN PL3	06414905424573
Packaging GTIN PL4	06414905295814
Item Unit Length	81
Item Unit Height	56
Item Unit Weight	0,14
Item Unit Width	32

Documents

Page with all documents

www.uponor.com