


Uponor S-Press PLUS U-tap elbow 20-Rp1/2"FT-16

1070631

- For on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.

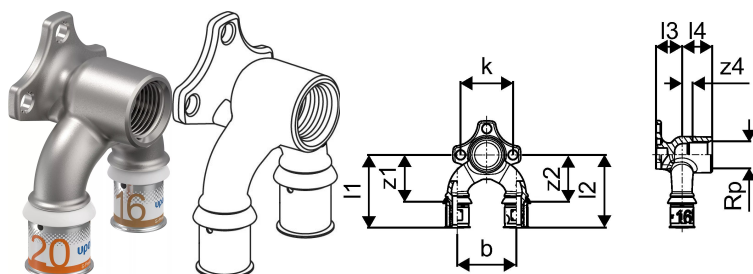

Application information Uponor S-Press PLUS U-tap elbow

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press PLUS U-tap elbow 20-Rp1/2"FT-16

1070631

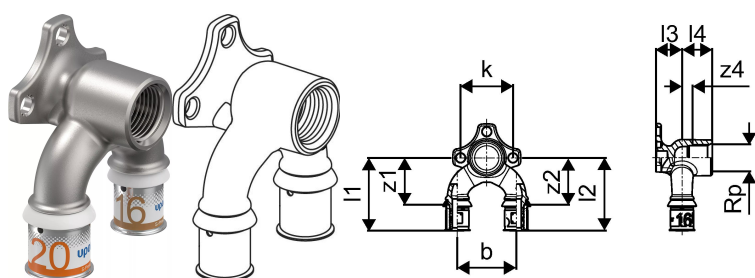

Technical data

Item no EAN	6414905219476
Item no GTIN	06414905219476
Item (unit of measurement)	pce
Female thread Rp	1/2 inch
Length (l1)	57 mm
Length (l2)	56 mm
Length (l3)	20 mm
Z-measurement b	45 mm
Z-measurement k	40 mm
Z-measurement z2	36 mm
Z-measurement z4	8 mm
Packaging Quantity 1	5
Packaging Quantity 4	960
Packaging GTIN PL1	06414905468874
Packaging GTIN PL4	06414905499809
Item Unit Length	83
Item Unit Height	43
Item Unit Weight	0,246
Item Unit Width	69

Documents

Page with all documents



Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com