


Uponor S-Press PLUS tap elbow L 20-Rp1/2"FT

1070645

- Made of tin-plated DR brass
- for on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.

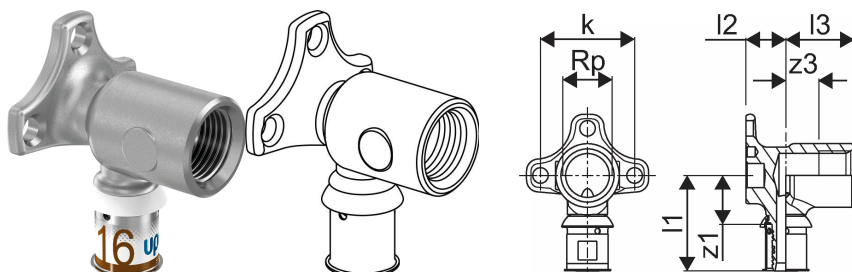

Application information Uponor S-Press PLUS tap elbow L

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press PLUS tap elbow L 20-Rp1/2"FT

1070645

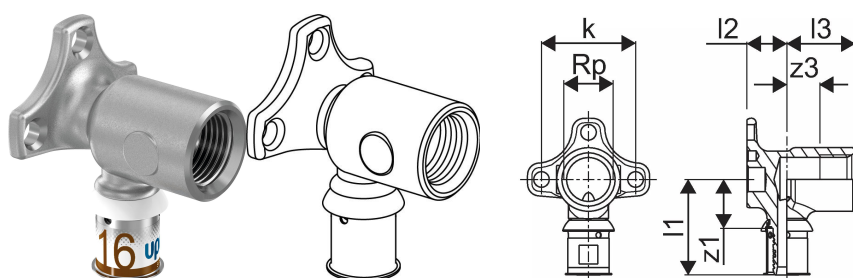

Technical data

Item no EAN	6414905219612
Item no GTIN	06414905219612
Item no VVS	045475120
RSK no.	1896556
Item no NRF	5114554
Item (unit of measurement)	pce
Female thread Rp	1/2 inch
Length (l1)	46 mm
Length (l2)	20 mm
Length (l3)	30 mm
Z-measurement k	40 mm
Z-measurement z3	15 mm
Packaging Quantity 1	10
Packaging Quantity 3	40
Packaging Quantity 4	1920
Packaging GTIN PL1	06414905280766
Packaging GTIN PL3	06414905424870
Packaging GTIN PL4	06414905280780
Item Unit Length	72
Item Unit Height	50
Item Unit Weight	0,173
Item Unit Width	51

Documents

Page with all documents



www.uponor.com