



## Uponor Fluvia T pumpgroup Push-23-B-W



**1078304**

- Pumpgroup pre-mounted
- Water temperature and flow rates controlled by thermostat with capillary sensor,
- Air bleed screw
- Max. primary temperature: 90°C
- Max. secondary temperature: 55°C
- Balancing valve primary
- Secondary connection G1 (MT)
- For installation left or right of manifold
- Maximal heat load: 10 kW
- kvs flow valve: 1,2 m3/h

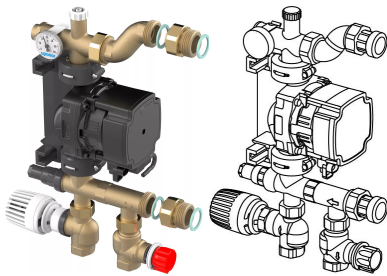

## Uponor Fluvia T pumpgroup Push-23-B-W

1078304

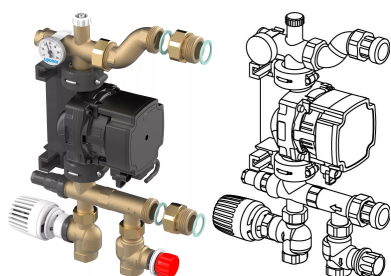

### Technical data

Item no EAN	4021598130128
Item no GTIN	04021598130128
Item no VVS	381111343
RSK no.	5363708
Item no NRF	8361001
Item no LVI	2025916
Item (unit of measurement)	pce
Length (l)	256 mm
Length (l1)	247 mm
Length (l2)	117 mm
Length (l3)	96 mm
Z-measurement b	70 mm
Z-measurement b1	226 mm
Z-measurement h	91 mm
Z-measurement h1	50 mm
Z-measurement w	343 mm
Packaging Quantity 1	1
Packaging Quantity 4	55
Packaging GTIN PL1	06414905469383
Packaging GTIN PL4	06414905500109
Item Unit Length	250
Item Unit Height	150
Item Unit Weight	3,99
Item Unit Width	100

[www.uponor.com](http://www.uponor.com)