


Uponor Ecoflex elbow Rp4-Rp4

1078366

- Thread Rp", hemp sealing
- 6 bar, SDR 11 / 10 bar, SDR 7,4
- DR = dezincification resistance brass

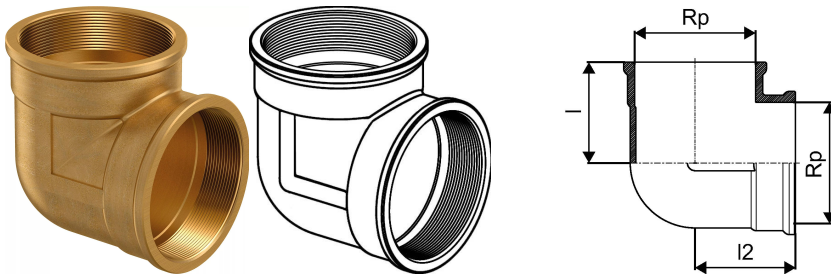

Application information Uponor Ecoflex elbow

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex elbow Rp4-Rp4

1078366

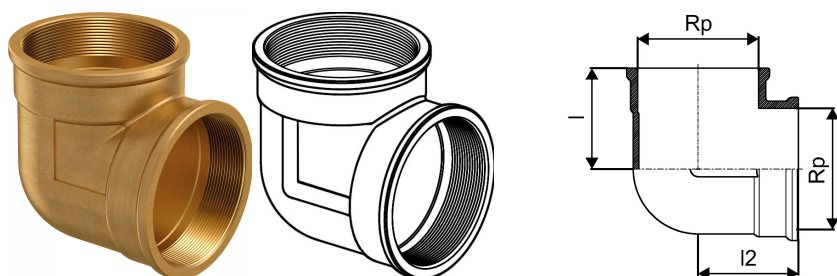

Technical data

Item no EAN	4021598130258
Item no GTIN	04021598130258
Item no VVS	087832016
RSK no.	2282486
Item no NRF	8361338
Item no LVI	1938511
Item (unit of measurement)	pce
Female thread Rp	4 inch
Length (l1)	92 mm
Length (l2)	92 mm
Packaging Quantity 1	1
Packaging GTIN PL1	06414900328289
Item Unit Length	150
Item Unit Height	127
Item Unit Weight	2,65
Item Unit Width	155

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com