


## Uponor Ecoflex reducer male x female R4-G3

1078369

- Outer conical thread R", hemp sealing
- Inner cylindric thread G" with sealing ring
- 6 bar, SDR 11 / 10 bar, SDR 7,4
- DR = dezincification resistance brass

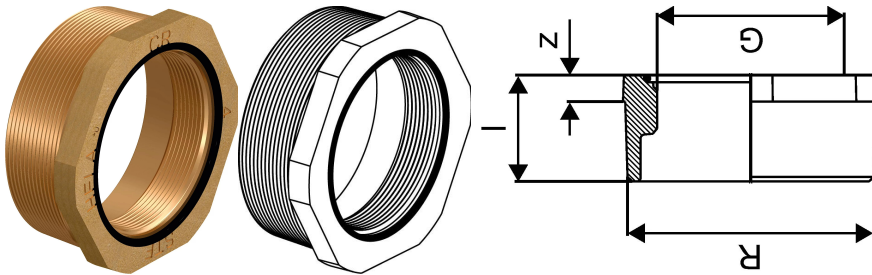

### Application information Uponor Ecoflex reducer male x female

#### Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

#### Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex reducer male x female R4-G3

1078369

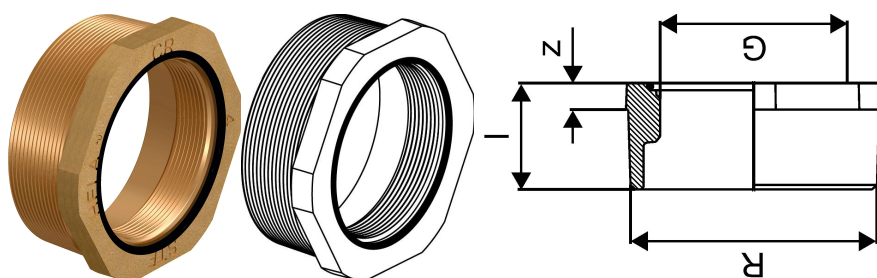

### Technical data

Item no EAN	4021598130289
Item no GTIN	04021598130289
Item no VVS	087836194
RSK no.	2282489
Item no NRF	8361342
Item no LVI	1938514
Item (unit of measurement)	pce
Length (l)	48 mm
z	12 mm
Packaging Quantity 1	1
Packaging Quantity 4	6
Packaging GTIN PL1	06414900328302
Packaging GTIN PL2	06414900328357
Item Unit Length	120
Item Unit Height	48
Item Unit Weight	1,26
Item Unit Width	120

### Documents

[Page with all documents](#)

#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)