


Uponor Ecoflex Aqua Twin 32x4,4-20x2,8/175

1084886

- Warm tap water with circulation
- Two medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- PEX foam, HDPE casing
- Coloured centre profil to avoid confusion of supply and circulation

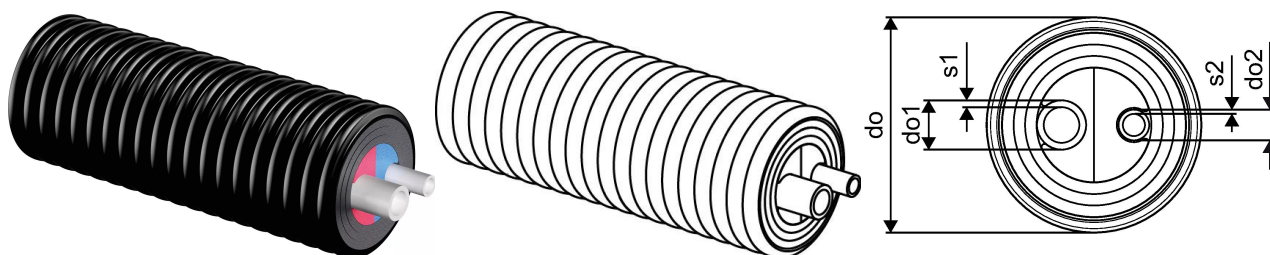

Application information Uponor Ecoflex Aqua Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approval should be checked by local responsible person

Uponor Ecoflex Aqua Twin 32x4,4-20x2,8/175

1084886

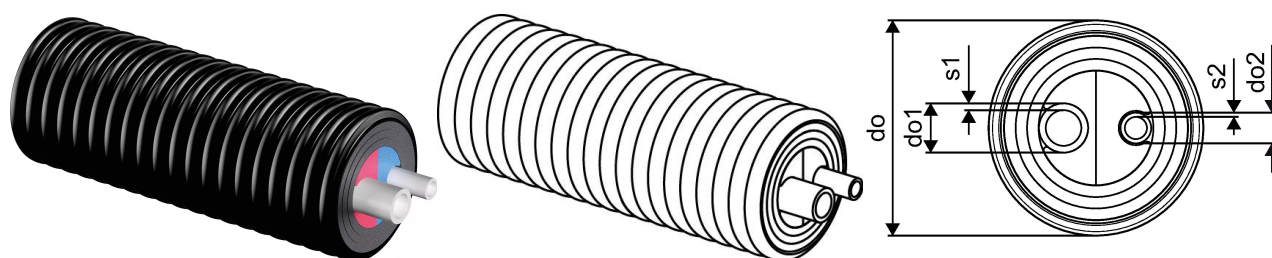

Technical data

Item no EAN	4021598133150
Item no GTIN	04021598133150
Item no VVS	087363732
RSK no.	2266160
Item no NRF	8360873
Item no LVI	3010174
Item (unit of measurement)	m
Bending radius 2	0,7 m
Packaging Quantity 1	200
Packaging GTIN PL1	06414905283491
Item Unit Length	1000
Item Unit Height	175
Item Unit Weight	2,5
Item Unit Width	175

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com