


Uponor Vario M manifold with flowmeter FM 3xG3/4 Euro

1085945

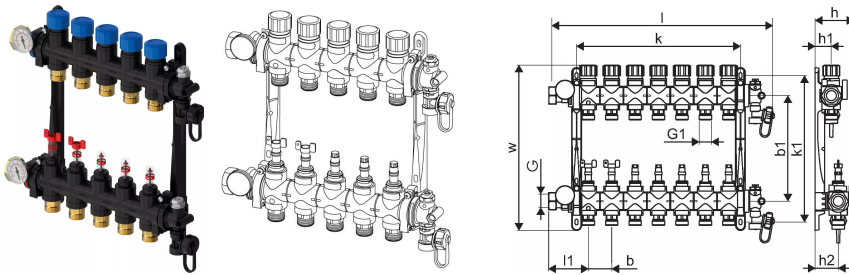

Application information Uponor Vario M manifold with flowmeter FM

Specification

- Made of fibre glass reinforced polyamid
- With integrated valves
- Connection right or left G1 with flat sealing
- Supply bar with flowmeter for balancing and shut-off
- Return bar with return valves and caps
- Integrated airvents and fill&drain points in supply and return
- Loop connection: G3/4" eurocone
- Loop pitch: 50 mm

Application

- For underfloor heating and cooling
- Max. pressure: 6 bar at 60°C
- Combineable with actuators FT 30x1,5

Uponor Vario M manifold with flowmeter FM 3xG3/4 Euro

1085945



Technical data

Item no EAN	4021598133747
Item no GTIN	04021598133747
Item (unit of measurement)	pce
Length (l)	270 mm
Length (l1)	85 mm
Z-measurement b	50 mm
Z-measurement b1	225 mm
Z-measurement h	83 mm
Z-measurement h1	34 mm
Z-measurement h2	49 mm
Z-measurement k	62 mm
Z-measurement k1	312 mm
Z-measurement w	353 mm
Packaging Quantity 1	1
Packaging Quantity 4	90
Packaging GTIN PL1	06414905471089
Packaging GTIN PL4	06414900329378
Item Unit Length	270
Item Unit Height	85
Item Unit Weight	1,42
Item Unit Width	360

Documents

Page with all documents



T +358 (0)20 129 211

www.uponor.com