


Uponor Smatrix Base wallframe Style T-149 A-14X

1087821

- T-149 surface adaptor for on-wall installation
- incl. mounting material
- color: white RAL9016

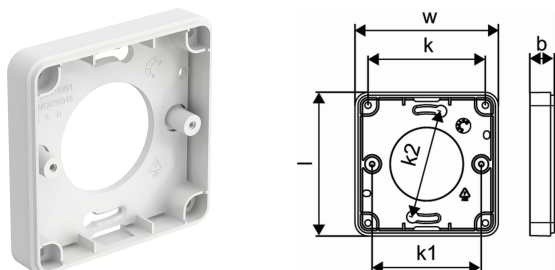

Application information Uponor Smatrix Base wallframe Style T-149 A-14X

Specification

- up to 4 controller in one system
- operating voltage: 230V
- autobalancing optimises energy use and comfort
- electric control
- supports up to 6 room thermostats and 8 actuators (24V) per controller
- pump and boiler relays
- valve and pump exercise
- relative humidity control
- different wiring options (daisy chain / star)
- 4-wire Bus installation
- communication protocol: RS485 serial bus
- max. power input per actuator: 24VAC / 0.2A (0.4A peak)

Smatrix Base Pulse:

- local access (Wi-Fi) or remote access (internet connection required) via Uponor Smatrix Pulse App (with R-208)
- temporary wi-fi access point for direct access (if local wi-fi is not available) (with R-208)
- smart home ecosystem integration (Amazon Alexa, Google Home) (with R-208)
- multi-home control (with R-208)
- third-party access for remote support (user allowance required) (with R-208)
- history trend analysis via Uponor Smatrix Pulse app (with R-208)
- timer programming (with R-208)
- comfort settings (with R-208)
- supply diagnostics (with R-208)

Application



- wired room temperature control for radiant heating and cooling
- set point range: +5°C ... +35°C

Certification

- CE / EAC

Uponor Smatrix Base wallframe Style T-149 A-14X

1087821



Technical data

Item no EAN	4021598149885
Item no GTIN	04021598149885
Item no VVS	466253070
RSK no.	2987815
Item no NRF	8361251
Item no LVI	2025248
Item (unit of measurement)	pce
Length (l)	77 mm
Z-measurement h	11 mm
Z-measurement w	77 mm
Packaging Quantity 1	1
Packaging Quantity 3	90
Packaging Quantity 4	2160
Packaging GTIN PL1	06414905630073
Packaging GTIN PL3	06414905285563
Packaging GTIN PL4	06414905630585
Item Unit Length	77
Item Unit Height	11
Item Unit Weight	0,023
Item Unit Width	77

Documents

Page with all documents



Finland

T +358 (0)20 129 211

www.uponor.com