


Uponor Thermatop M 1750X277mm


1090935

- Emitter made of 16 x 2,0 mm Uni Pipe PLUS with 10 pipe rows and up to 37,3 m per m² module.
- For grid distances of CD-profiles of 333mm
- The pipe is 100% diffusion-resistant according to DIN 4726.
- Cooling capacity according to EN 14240 (8K) up to 67 W/m²
- Heating capacity according to EN 14037 (15K) up to 105 W/m².
- Sound absorption according to DIN EN ISO 354 with α_w between 0,60 to 0,65.
- Capacity and acoustic values depending on gypsum board.

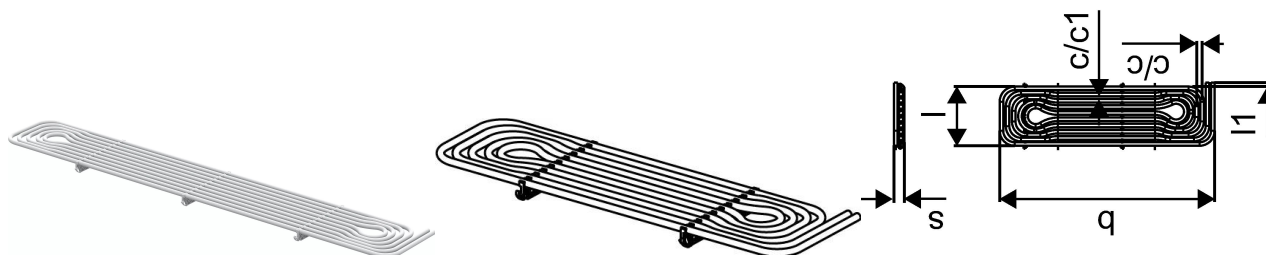

Uponor Thermatop M 1750X277mm

1090935

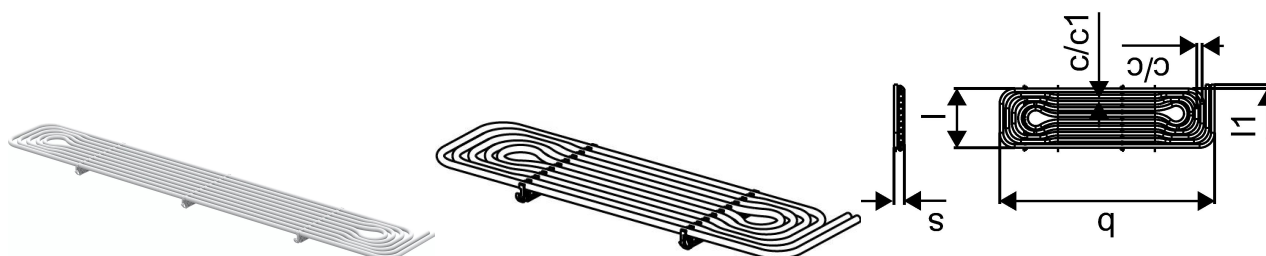

Technical data

Item no EAN	6414905222001
Item no GTIN	06414905222001
Item (unit of measurement)	pce
Distance center	24 mm
Distance center 1	28 mm
Length (l)	277 mm
Length (l1)	17 mm
Z-measurement b	1750 mm
Packaging Quantity 1	10
Packaging Quantity 4	200
Packaging GTIN PL1	06414905269297
Packaging GTIN PL4	06414905277131
Item Unit Length	1750
Item Unit Height	39
Item Unit Weight	2,15
Item Unit Width	277

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com