


Uponor Ecoflex Thermo Twin HP 2x32x2,9-2x32x3,5/140

1093894

- A to B or heat pump connection pipe, heating and cooling
- Two medium pipe PE-Xa with oxygen barrier, SDR 11
- Two cable conduits for power and data cables
- Max. load 6 bar / 95°C
- Coloured centre profil to avoid confusion of flow and return line
- PEX foam, HDPE casing

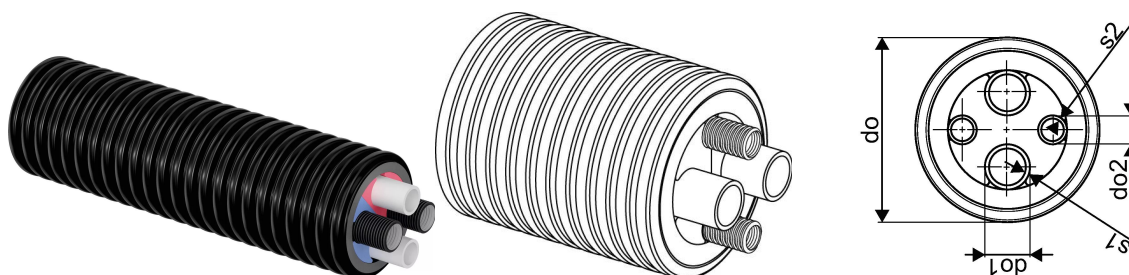

Application information Uponor Ecoflex Thermo Twin HP

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11) or PN 10 (SDR 7,4), Oxygen tightness based on EN 15632
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Thermo Twin HP 2x32x2,9-2x32x3,5/140

1093894

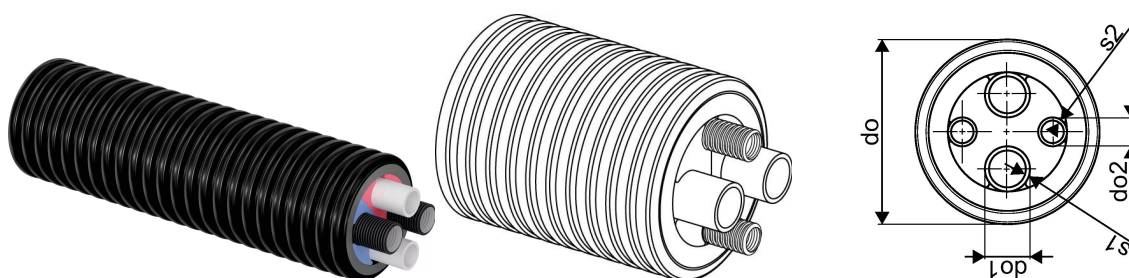

Technical data

Item no EAN	6414905231607
Item no GTIN	06414905231607
Item no VVS	087808132
RSK no.	2266306
Item no LVI	3010125
Item (unit of measurement)	m
Bending radius 2	0,5 m
Packaging Quantity 1	200
Packaging GTIN PL1	06414905473526
Item Unit Length	1000
Item Unit Height	140
Item Unit Weight	1,655
Item Unit Width	140

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com