


Uponor Fluvia T pumpgroup Push-12 WL-G


1095130

- Integrated pump: Q: 0,1 - 0,4 m³/h, H: 0,2 - 1,1 m, Phyd< 1W
- Bracket for left- or right installation
- Air bleed screw
- Secondary circuit temp. range 20-50°C
- Balancing valve
- Secondary loop 3/4" eurocone
- Primary valves with clampconnection for CU-Pipe 15mm
- For control of UFH in small zones
- Max. primary temperature: 90°C
- Max. secondary temperature: 55°C
- Pumpgroup with actuator 230 V, wireless thermostat and wireless receiver
- Secondary max. temperature limiter by 60°C

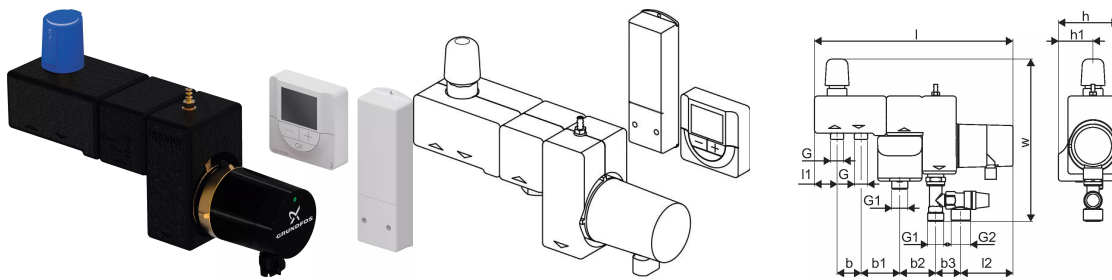

Uponor Fluvia T pumpgroup Push-12 WL-G

1095130

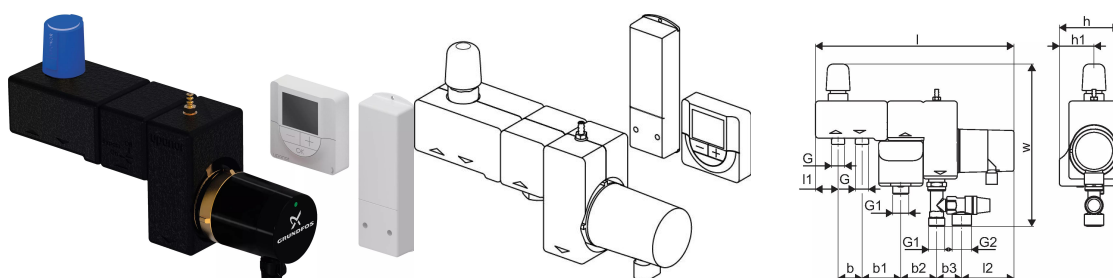

Technical data

| | |
|----------------------------|----------------|
| Item no EAN | 6414905428632 |
| Item no GTIN | 06414905428632 |
| Item no VVS | 381121143 |
| RSK no. | 2988789 |
| Item no NRF | 8361165 |
| Item no LVI | 2025004 |
| Item (unit of measurement) | pce |
| Length (l) | 332 mm |
| Length (l1) | 38 mm |
| Length (l2) | 129 mm |
| Z-measurement b | 40 mm |
| Z-measurement b1 | 65 mm |
| Z-measurement b2 | 60 mm |
| Z-measurement h | 84 mm |
| Z-measurement h1 | 42 mm |
| Z-measurement w | 240 mm |
| Packaging Quantity 1 | 1 |
| Packaging Quantity 4 | 60 |
| Packaging GTIN PL1 | 06414905475759 |
| Packaging GTIN PL4 | 06414905475766 |
| Item Unit Length | 332 |
| Item Unit Height | 240 |
| Item Unit Weight | 3,1 |
| Item Unit Width | 84 |

www.uponor.com