


Uponor Fluvia T pumpgroup Push-12 WL-G


1095130

- Integrated pump: Q: 0,1 - 0,4 m³/h, H: 0,2 - 1,1 m, Phyd< 1W
- Bracket for left- or right installation
- Air bleed screw
- Secondary circuit temp. range 20-50°C
- Balancing valve
- Secondary loop 3/4" eurocone
- Primary valves with clampconnection for CU-Pipe 15mm
- For control of UFH in small zones
- Max. primary temperature: 90°C
- Max. secondary temperature: 55°C
- Pumpgroup with actuator 230 V, wireless thermostat and wireless receiver
- Secondary max. temperature limiter by 60°C

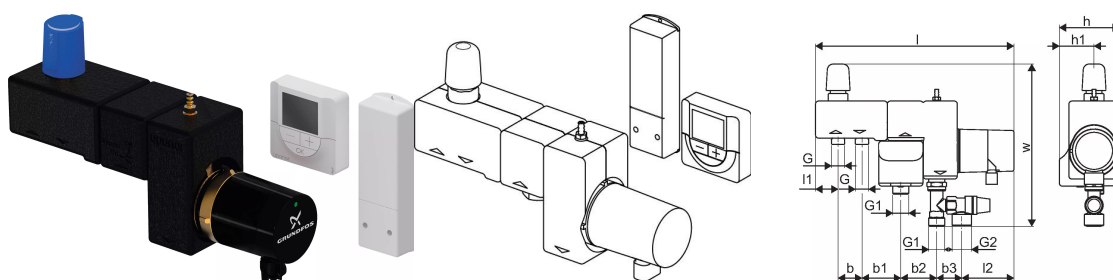

Uponor Fluvia T pumpgroup Push-12 WL-G

1095130

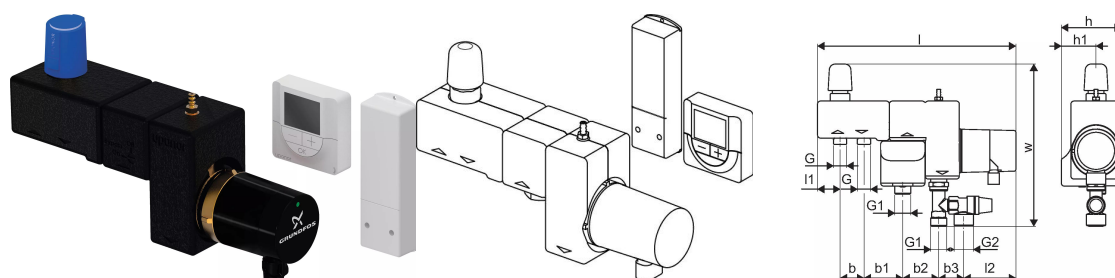

Technical data

Item no EAN	6414905428632
Item no GTIN	06414905428632
Item no VVS	381121143
RSK no.	2988789
Item no NRF	8361165
Item no LVI	2025004
Item (unit of measurement)	pce
Length (l)	332 mm
Length (l1)	38 mm
Length (l2)	129 mm
Z-measurement b	40 mm
Z-measurement b1	65 mm
Z-measurement b2	60 mm
Z-measurement h	84 mm
Z-measurement h1	42 mm
Z-measurement w	240 mm
Packaging Quantity 1	1
Item Replacement 1	1059851
Packaging GTIN PL1	06414905475759
Packaging GTIN PL4	06414905475766

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com