


## Uponor Fluvia T pumpgroup Push-12 CH-G


### 1095131

- Integrated pump: Q: 0,1 - 0,4 m<sup>3</sup>/h, H: 0,2 - 1,1 m, Phyd< 1W
- Bracket for left- or right installation
- Air bleed screw
- Secondary circuit temp. range 20-50°C
- Balancing valve
- Secondary loop 3/4" eurocone
- Primary valves with clampconnection for CU-Pipe 15mm
- For control of UFH in small zones
- Max. primary temperature: 90°C
- Max. secondary temperature: 55°C
- With cartridge heater for UFH in summer mode
- Room temperature control by controller X-161
- Compatible to Uponor Smatrix Wave thermostats T-166, T-168 , T-169
- With safety sensor against overheating
- Secondary max. temperature limiter by 50°C

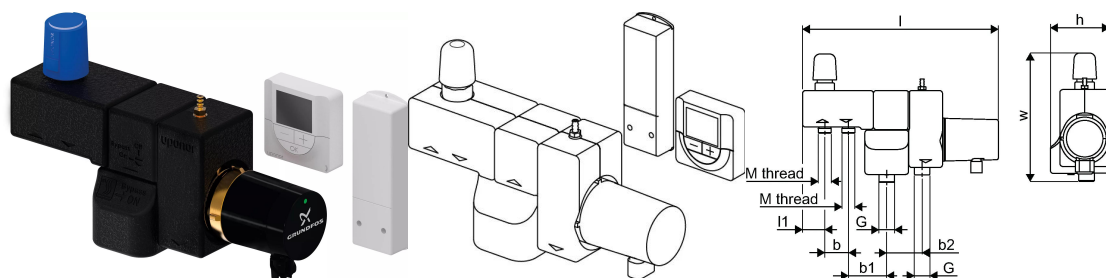

## Uponor Fluvia T pumpgroup Push-12 CH-G

1095131

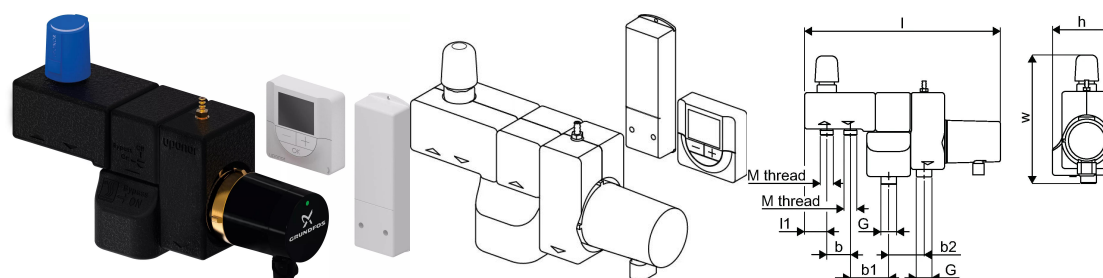

### Technical data

Item no EAN	6414905428649
Item no GTIN	06414905428649
RSK no.	2988790
Item no LVI	2025019
Item (unit of measurement)	pce
Cylindric thread G2	32 inch
Length (l)	331 mm
Length (l1)	38 mm
Length (l2)	87 mm
Metric thread M	22 mm
Metric thread M1	32 mm
Z-measurement b	40 mm
Z-measurement b1	65 mm
Z-measurement b2	60 mm
Z-measurement h	100 mm
Z-measurement h1	58 mm
Z-measurement w	271 mm
Packaging Quantity 1	1
Packaging Quantity 4	30
Packaging GTIN PL1	06414905475773
Packaging GTIN PL4	06414905475780
Item Unit Length	332
Item Unit Height	213
Item Unit Weight	3,98
Item Unit Width	100