


Uponor RS adapter S-Press PLUS 20-RS2

1095818

- tin plated
- made of DR material
- press without bevel

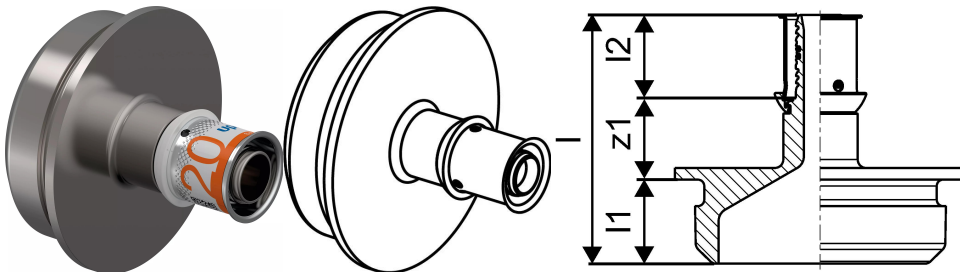

Application information Uponor RS adapter S-Press PLUS

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter S-Press PLUS 20-RS2

1095818

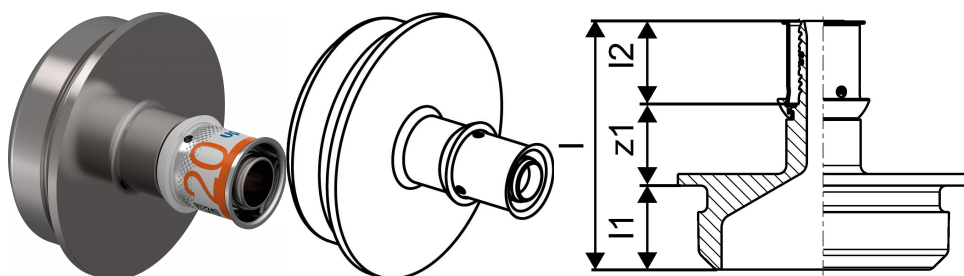

Technical data

Item no EAN	6414905480111
Item no GTIN	06414905480111
Item no VVS	045450320
RSK no.	1899573
Item no NRF	5071315
Item no LVI	1720835
Item (unit of measurement)	pce
Length (l)	61 mm
Length (l1)	20 mm
Length (l2)	21 mm
Packaging Quantity 1	1
Packaging Quantity 4	378
Packaging GTIN PL1	06414905481583
Packaging GTIN PL4	0641490555574
Item Unit Length	61
Item Unit Height	70
Item Unit Weight	0,3263
Item Unit Width	70

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com