


## Uponor Fluvia pumpgroup CPG-15-D-W


**1119448**

- Pre-mounted
- Fluvia Move pump groups with supply temperature controller Uponor Smatrix Move
- Fluvia T can be installed with brackets left or right on the installation
- Max. primary temperature: 90°C
- Max. secondary temperature: 55 - 60°C
- For installation in central distribution room
- Nominal heat output: 15 kW
- Pump Wilo Para: Q: 0,1-2,5 m³/h, H: 6-2,4 m, EEI 0,17
- Primary connection Rp1 (FT)
- Secondary ball valves with thermometer, connection Rp1 (FT)
- Uponor variable kvs-value and Uponor Smatrix move controller can be adapted

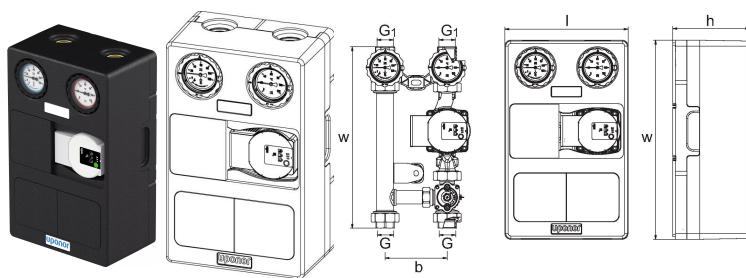

## Uponor Fluvia pumpgroup CPG-15-D-W

1119448

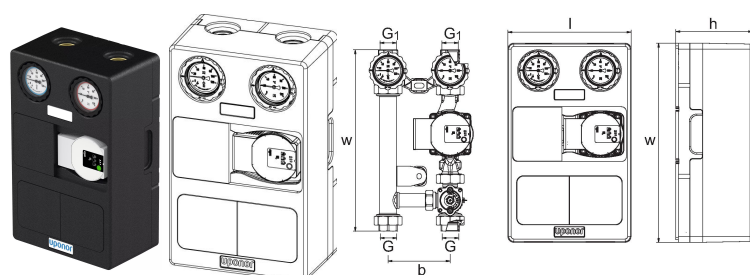

### Technical data

Item no EAN	6414905650422
Item no GTIN	06414905650422
Item no NRF	8361257
Item (unit of measurement)	pce
Length (l)	248 mm
Z-measurement b	125 mm
Z-measurement h	154 mm
Z-measurement w	365 mm
Z-measurement w1	400 mm
Packaging Quantity 1	1
Packaging Quantity 4	18
Packaging GTIN PL1	06414905650439
Packaging GTIN PL4	06414905650446
Item Unit Length	400
Item Unit Height	154
Item Unit Weight	4,7
Item Unit Width	248

#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)