


Uponor Vario B manifold body FM 3x3/4 Euro

1135302

- Supply with flow meter for balancing and shutoff
- Return with valves and caps
- without primary connection

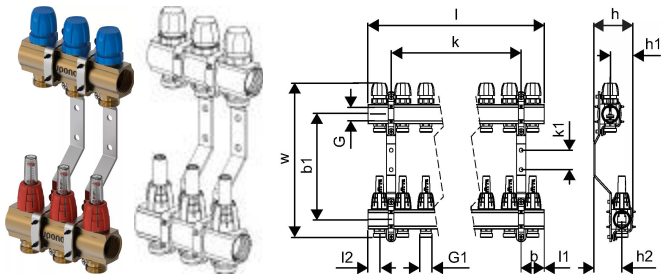

Application information Uponor Vario B manifold body FM

Specification


- Made of brass
- With integrated valves
- Connection right or left with flat sealing supply
- With lockshield valve or flowmeter for balancing and shutoff
- no primary connection to combine it with the correct accessories
- Loop connection G3/4" eurocone
- Loop distance 50 mm
- Bracket distance 210 mm

Application

- For underfloor heating and cooling
- Combineable with actuators FT 30x1,5
- Max. pressure: 6 bar at 60°C

Uponor Vario B manifold body FM 3x3/4 Euro

1135302

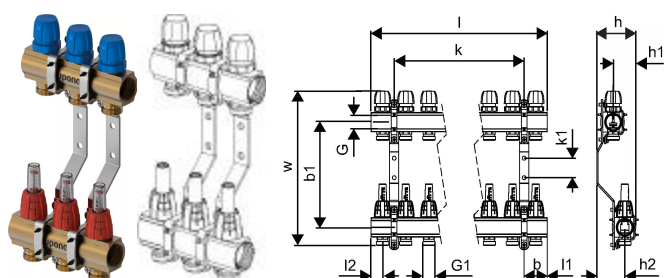

Technical data

Item no EAN	6414900366533
Item no GTIN	06414900366533
Item (unit of measurement)	pce
Length (l)	150 mm
Length (l1)	25 mm
Length (l2)	25 mm
Z-measurement b	50 mm
Z-measurement b1	210 mm
Z-measurement h	85 mm
Z-measurement h1	35,5 mm
Z-measurement h2	60,5 mm
Z-measurement k	50 mm
Z-measurement k1	39 mm
Z-measurement w	308 mm
Packaging Quantity 1	1
Packaging Quantity 4	72
Packaging GTIN PL1	06414900424189
Packaging GTIN PL4	06414900325530
Item Unit Length	150
Item Unit Height	130
Item Unit Weight	2,67
Item Unit Width	105

Documents

Page with all documents



www.uponor.com