


## Uponor Vario S manifold FM 10xG3/4 Euro - G1

**1140841**

- Supply beam with flowmeters for balancing and shutoff, with memory ring
- Return beam with valves for shutoff, with hand caps

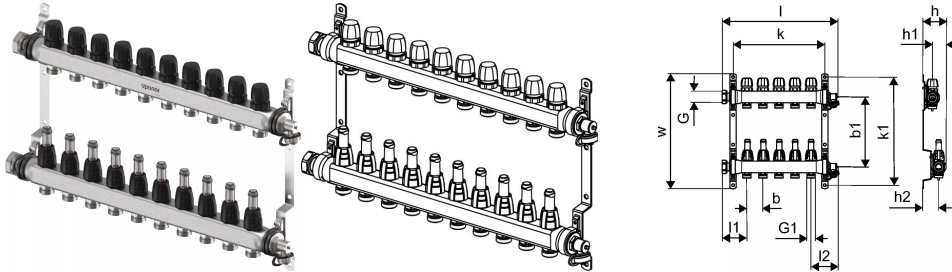

### Application information Uponor Vario S manifold FM

#### Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

#### Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

## Uponor Vario S manifold FM 10xG3/4 Euro - G1

1140841

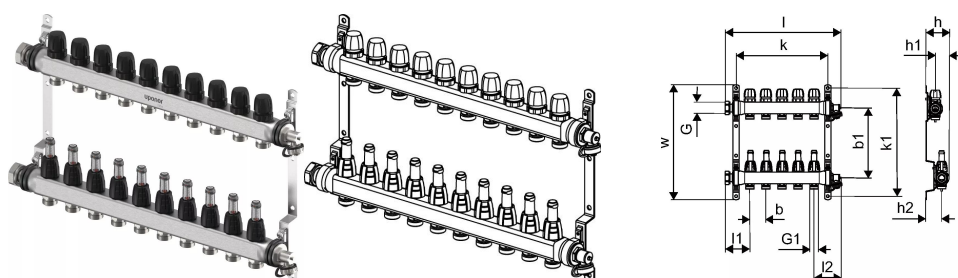

### Technical data

Item no EAN	6414900440486
Item no GTIN	06414900440486
Item no NRF	8361368
Item no LVI	2022298
Item (unit of measurement)	pce
Length (l)	614 mm
Length (l1)	77 mm
Length (l2)	87 mm
Z-measurement b	50 mm
Z-measurement b1	217 mm
Z-measurement h	73 mm
Z-measurement h1	30 mm
Z-measurement h2	50 mm
Z-measurement k	535 mm
Z-measurement k1	336 mm
Z-measurement w	357 mm
Packaging Quantity 1	1
Packaging Quantity 4	54
Packaging GTIN PL1	06414900500807
Packaging GTIN PL4	06414900322966
Item Unit Length	610
Item Unit Height	40
Item Unit Weight	6
Item Unit Width	235

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)