


Uponor Vario S manifold LS 2xG3/4 Euro - G1

1140863

- Supply beam with lock shield valves for balancing and shutoff
- Return beam with valves for shutoff, with hand caps

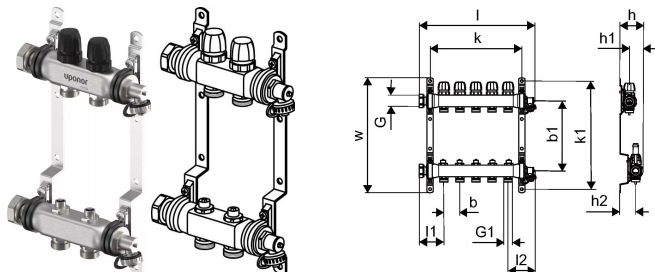

Application information Uponor Vario S manifold LS

Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

Uponor Vario S manifold LS 2xG3/4 Euro - G1

1140863

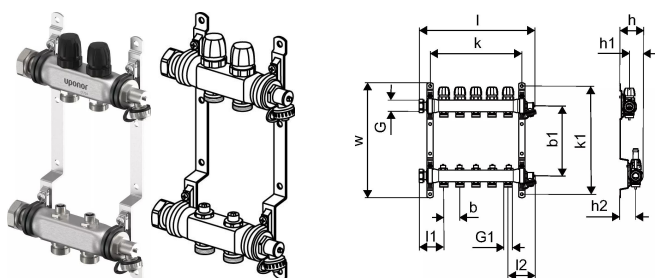

Technical data

Item no EAN	6414900440707
Item no GTIN	06414900440707
Item no VVS	046230102
Item no NRF	8361372
Item no LVI	2022246
Item (unit of measurement)	pce
Length (l1)	214 mm
Length (l2)	87 mm
Z-measurement b	50 mm
Z-measurement b1	217 mm
Z-measurement h	73 mm
Z-measurement h1	30 mm
Z-measurement h2	50 mm
Z-measurement k	135 mm
Z-measurement k1	336 mm
Z-measurement w	357 mm
Packaging Quantity 1	1
Packaging Quantity 4	108
Packaging GTIN PL1	06414900500876
Packaging GTIN PL4	06414900501361
Item Unit Length	210
Item Unit Height	40
Item Unit Weight	1,7
Item Unit Width	235

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com