


Uponor Vario PLUS actuator NC MT 230V 1W IP54

1141678

- Vario PLUS, MAGNA manifold actuator
- first open function,
- height: 61 mm + adaptor ring
- stroke length: 5mm
- connection cable: 2x 0.75mm²x1m

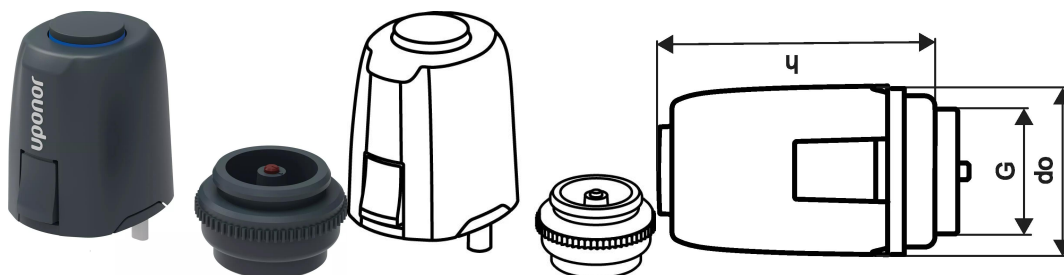

Application information Uponor Vario PLUS actuator NC

Specification

- Modular fibre glass reinforced polyamide manifold with 1,3,4,6 loops for connection with basic kit
- connection right or left with flat sealing or connection from below with optional elbowset
- supply with lockshield (LS) valve for balancing with adjusting ring or supply with Flowmeter (FM) for balancing
- shut-off and flow view
- adjusting ring for balancing without tools
- prepared places for room name labels
- return with valves and caps, prepared for actuators
- loop connection G3/4" eurocone
- loop pitch 50 mm
- header pitch 225 mm

Actuator:

- NC (normally closed) = closes without power

Application


- for underfloor heating and cooling
- combineable with actuators MT 30x1,5

Certification

- CE

Uponor Vario PLUS actuator NC MT 230V 1W IP54

1141678

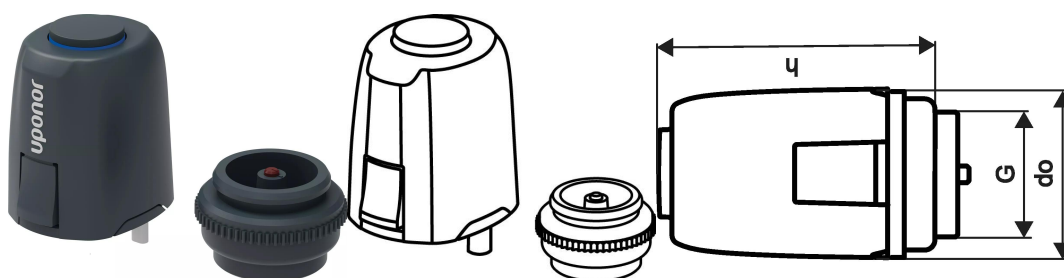

Technical data

Item no EAN	6414900383783
Item no GTIN	06414900383783
Item no VVS	466235530
RSK no.	2973123
Item no NRF	8361388
Item no LVI	2022272
Item (unit of measurement)	pce
Z-measurement h	83 mm
Packaging Quantity 1	1
Packaging Quantity 4	100
Packaging Quantity 4	1200
Packaging GTIN PL1	06414900383844
Packaging GTIN PL2	06414900385374
Packaging GTIN PL4	06414900385404
Item Unit Length	50
Item Unit Height	83
Item Unit Weight	0,12
Item Unit Width	30

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com