


## Uponor Vario PLUS actuator NC MT 24V 1W IP54

**1141679**

- Vario PLUS, MAGNA manifold actuator
- first open function,
- height: 61 mm + adaptor ring
- stroke length: 5mm
- connection cable: 2x 0.75mm<sup>2</sup>x1m

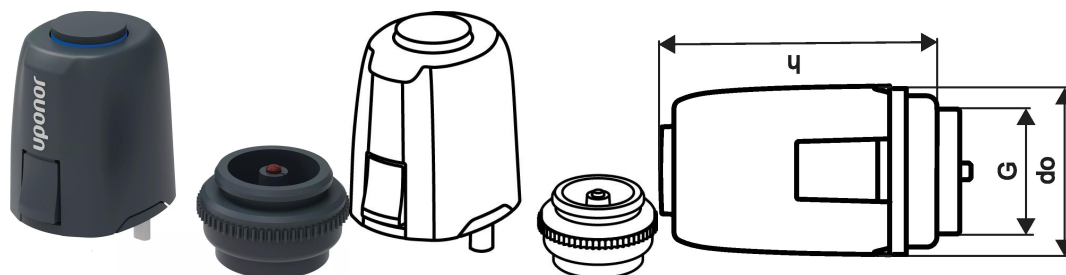

### Application information Uponor Vario PLUS actuator NC

#### Specification

- Modular fibre glass reinforced polyamide manifold with 1,3,4,6 loops for connection with basic kit
- connection right or left with flat sealing or connection from below with optional elbowset
- supply with lockshield (LS) valve for balancing with adjusting ring or supply with Flowmeter (FM) for balancing
- shut-off and flow view
- adjusting ring for balancing without tools
- prepared places for room name labels
- return with valves and caps, prepared for actuators
- loop connection G3/4" eurocone
- loop pitch 50 mm
- header pitch 225 mm

Actuator:

- NC (normally closed) = closes without power

#### Application


- for underfloor heating and cooling
- combineable with actuators MT 30x1,5

#### Certification

- CE

## Uponor Vario PLUS actuator NC MT 24V 1W IP54

1141679

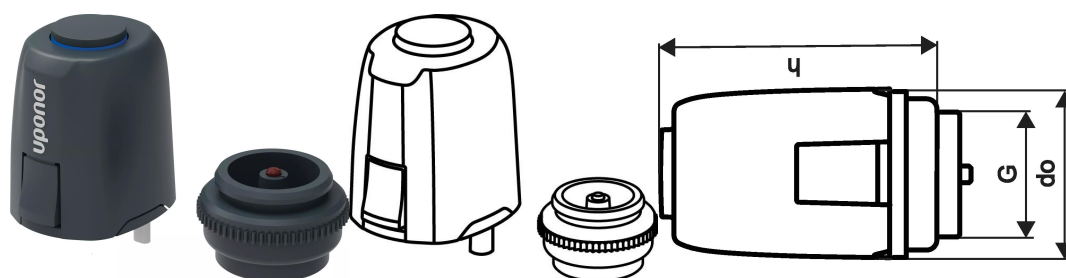

### Technical data

Item no EAN	6414900383790
Item no GTIN	06414900383790
Item no VVS	466235524
RSK no.	2973124
Item no NRF	8361389
Item no LVI	2022273
Item (unit of measurement)	pce
Z-measurement h	83 mm
Packaging Quantity 1	1
Packaging Quantity 4	100
Packaging Quantity 4	1200
Packaging GTIN PL1	06414900383851
Packaging GTIN PL2	06414900385381
Packaging GTIN PL4	06414900385411
Item Unit Length	50
Item Unit Height	83
Item Unit Weight	0,12
Item Unit Width	30

### Documents

Page with all documents

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)