


Uponor Vario PLUS actuator NC 24V MT30x1,5

1000138

- open/closed indicator
- operation at ambient temperature of up to +60°C
- protection class: IP54

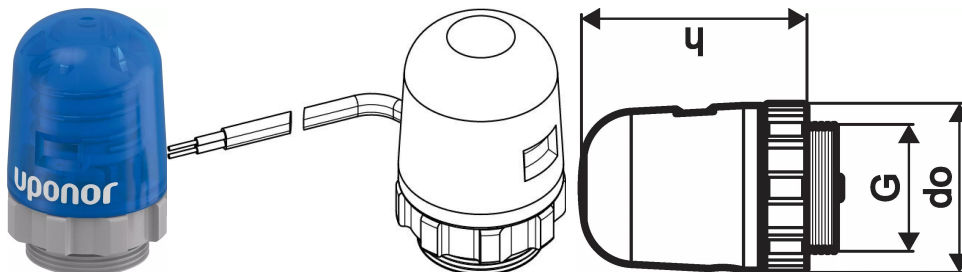

About Uponor Vario PLUS actuator NC

Specification

- Modular fibre glass reinforced polyamide manifold with 1,3,4,6 loops for connection with basic kit
- connection right or left with flat sealing or connection from below with optional elbowset
- supply with lockshield (LS) valve for balancing with adjusting ring or supply with Flowmeter (FM) for balancing
- shut-off and flow view
- adjusting ring for balancing without tools
- prepared places for room name labels
- return with valves and caps, prepared for actuators
- loop connection G3/4" eurocone
- loop pitch 50 mm
- header pitch 225 mm

Actuator:

- NC (normally closed) = closes without power

Application


- for underfloor heating and cooling
- combineable with actuators MT 30x1,5

Certification

- CE

Uponor Vario PLUS actuator NC 24V MT30x1,5

1000138

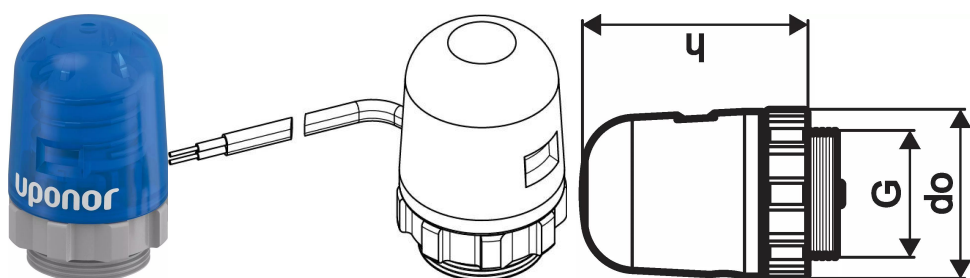

Technical data

Item no EAN	4021598022218
Item no GTIN	04021598022218
Item no VVS	466234201
RSK no.	2418961
Item no NRF	8362649
Item no LVI	2025231
Item (unit of measurement)	pce
Metric_thread_M	30x1.5 mm
Z-measurement h	54 mm
Packaging Quantity 1	1
Packaging Quantity 3	10
Packaging Quantity 4	2000
Packaging GTIN PL1	06414905562060
Packaging GTIN PL3	06414905562077
Packaging GTIN PL4	06414905635726
Item Unit Length	40
Item Unit Height	63
Item Unit Weight	0,11
Item Unit Width	40

Technical documents

Download documents here

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb