


Uponor Vario PLUS connection set

1005227

- For Uponor Vario Plus manifolds with special-thread for tool-free connection from left or right
- Consists of 2 segments
- One segment with 1/2" thread (plugged) prepared for heatmeter immersion sensor in combination with 1062462 Uponor HM Nipple for temperature sensor G1/2"xM10x1

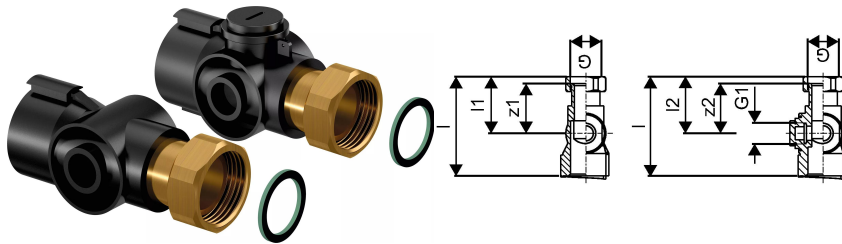

About Uponor Vario PLUS connection set

Specification

- Modular fibre glass reinforced polyamide manifold with 1,3,4,6 loops for connection with basic kit
- connection right or left with flat sealing or connection from below with optional elbowset
- supply with lockshield (LS) valve for balancing with adjusting ring or supply with Flowmeter (FM) for balancing
- shut-off and flow view
- adjusting ring for balancing without tools
- prepared places for room name labels
- return with valves and caps, prepared for actuators
- loop connection G3/4" eurocone
- loop pitch 50 mm
- header pitch 225 mm

Actuator:

- NC (normally closed) = closes without power

Application


- for underfloor heating and cooling
- combineable with actuators MT 30x1,5

Certification

- CE

Uponor Vario PLUS connection set

1005227

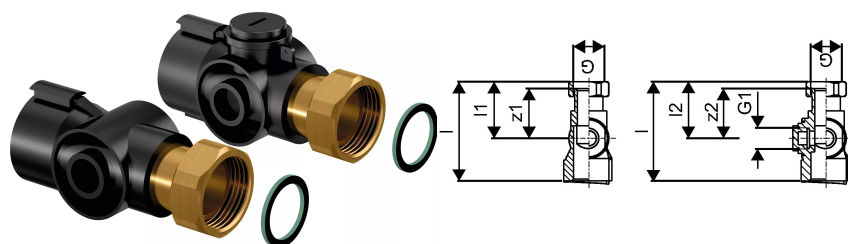

Technical data

Item no EAN	4021598023932
Item no GTIN	04021598023932
Item no VVS	087602120
RSK no.	2418965
Item no NRF	8362654
Item no LVI	2026803
Item (unit of measurement)	set
Length (l)	99 mm
Length (l1)	57 mm
Packaging Quantity 1	1
Packaging Quantity 3	10
Packaging GTIN PL1	06414905251827
Packaging GTIN PL3	06414905251834
Item Unit Length	35
Item Unit Height	80
Item Unit Weight	0,351
Item Unit Width	35

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb