


Uponor Minitec coupling, rings 9,9x1,1

1005264

- Q&E
- Made of Brass
- With Q&E rings

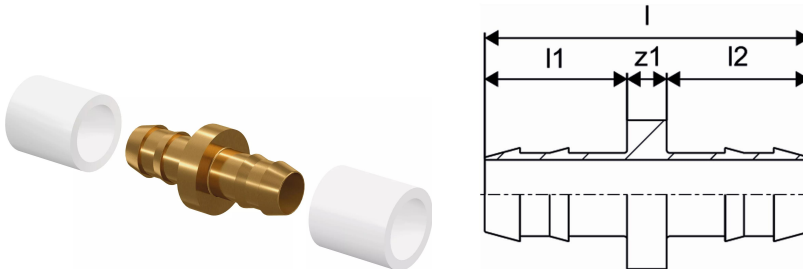

About Uponor Minitec coupling, rings

Specification

- Minitec underfloor heating system for fixation on solid floors or specified insulation materials
- designed as sturdy pipe fixing system of minimum height, with integrated pipe laying channels for correct pipe laying distances
- for use with Uponor Minitec PE-Xa pipes 9.9 x 1.1 mm; allowing for straight and diagonal pipe laying
- EN 13501-1 fire classification: class E.
- standard flammability, building-material class B2, conforming to DIN 4102.
- Pipe spacing: Vz 5, 10, 15
- Net surface with overlapping nubs: 0,77m²

Application


- radiant underfloor heating and cooling
- very low construction height
- for use with qualified filler materials

Certification

- DIN CERTCO: 7F170-F

Uponor Minitec coupling, rings 9,9x1,1

1005264

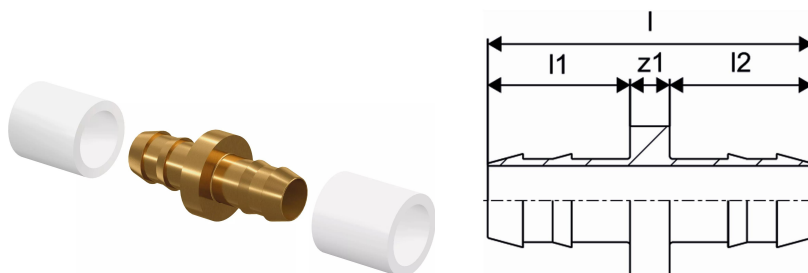

Technical data

Item no EAN	4021598024991
Item no GTIN	04021598024991
RSK no.	2973230
Item no LVI	2024559
Item (unit of measurement)	pce
Length (l)	33 mm
Length (l1)	14 mm
Length (l2)	14 mm
Packaging Quantity 1	10
Packaging Quantity 3	100
Packaging Quantity 4	9600
Packaging GTIN PL1	06414905251919
Packaging GTIN PL3	06414905251926
Packaging GTIN PL4	06414905251933
Item Unit Length	13
Item Unit Height	34
Item Unit Weight	0,011
Item Unit Width	13

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb