


Uponor Contec ceiling pipe lead through DDE 20mm


1005376

- Patented element is designed that after concreting, the pipes can be pulled out under the ceiling slab and connected to the manifold or supply line below the ceiling.
- For pipes up to 20 mm.
- Stackable for alignment to other elements.
- A small red flag indicates pull direction of the pipe.
- Delivered including nails for fixing to supports.
- Length: 540 mm
- Width: 39 mm
- Height: 29 mm
- Max. height: 57 mm (at the connection point)

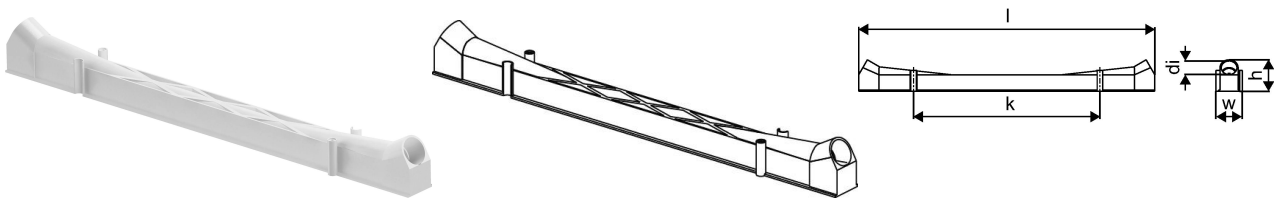

Uponor Contec ceiling pipe lead through DDE 20mm

1005376

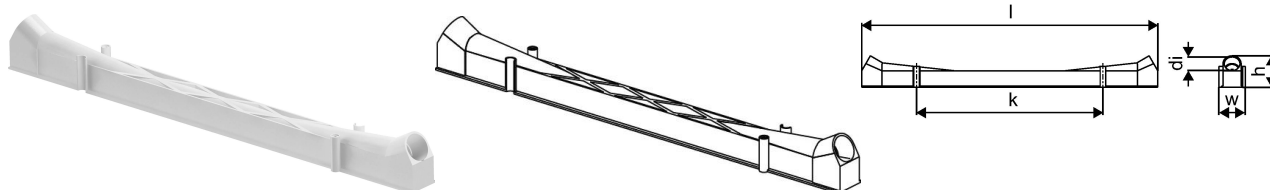

Technical data

Item no EAN	4021598027855
Item no GTIN	04021598027855
Item (unit of measurement)	pce
Length (l)	540 mm
Z-measurement h	57 mm
Z-measurement k	340 mm
Z-measurement w	48 mm
Packaging Quantity 1	10
Packaging Quantity 3	50
Packaging Quantity 4	1000
Packaging Material short PL1	LDPE
Packaging Material short PL3	PAP
Packaging Material PL1	Low density polyethylene
Packaging Material PL3	Corrugated fibreboard
Packaging GTIN PL1	06414905252220
Packaging GTIN PL3	06414905252237
Packaging GTIN PL4	06414905252244
Item Unit Length	540
Item Unit Height	58
Item Unit Weight	0,17
Item Unit Width	43

Blackmor Lane The Pavilion
 WD18 8GA, Watford
 UK

T +44 (0)1923 927000
 E enquiries.uk@uponor.com

www.uponor.com/en-gb