


## Uponor Vario PLUS actuator NC 230V MT30x1,5

**1005605**

- open/closed indicator
- operation at ambient temperature of up to +60°C
- protection class: IP54

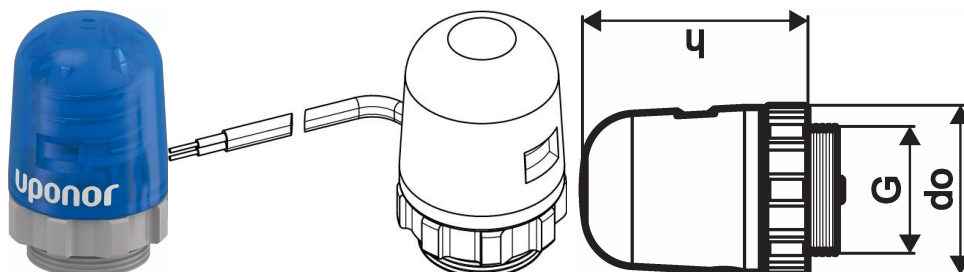

### About Uponor Vario PLUS actuator NC

#### Specification

- Modular fibre glass reinforced polyamide manifold with 1,3,4,6 loops for connection with basic kit
- connection right or left with flat sealing or connection from below with optional elbowset
- supply with lockshield (LS) valve for balancing with adjusting ring or supply with Flowmeter (FM) for balancing
- shut-off and flow view
- adjusting ring for balancing without tools
- prepared places for room name labels
- return with valves and caps, prepared for actuators
- loop connection G3/4" eurocone
- loop pitch 50 mm
- header pitch 225 mm

Actuator:

- NC (normally closed) = closes without power

#### Application


- for underfloor heating and cooling
- combineable with actuators MT 30x1,5

#### Certification

- CE

## Uponor Vario PLUS actuator NC 230V MT30x1,5

1005605

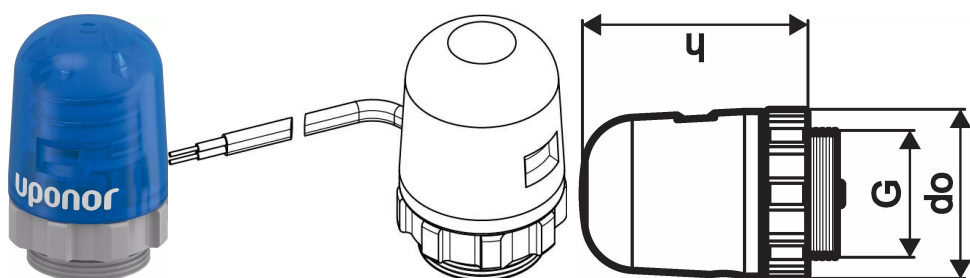

### Technical data

Item no EAN	4021598022294
Item no GTIN	04021598022294
Item no VVS	466234202
RSK no.	2418962
Item no NRF	8362651
Item no LVI	2025232
Item (unit of measurement)	pce
Metric_thread_M	30x1.5 mm
Z-measurement h	54 mm
Packaging Quantity 1	1
Packaging Quantity 3	10
Packaging Quantity 4	2000
Packaging GTIN PL1	06414905581917
Packaging GTIN PL3	06414905581924
Packaging GTIN PL4	06414905635740
Item Unit Length	40
Item Unit Height	63
Item Unit Weight	0,11
Item Unit Width	40

### Technical documents

Download documents here

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)