


Uponor Radi Pipe natural PN6 S 50x4,6 6m

1008940

- Operating pressure 6 bar
- 6 m bars

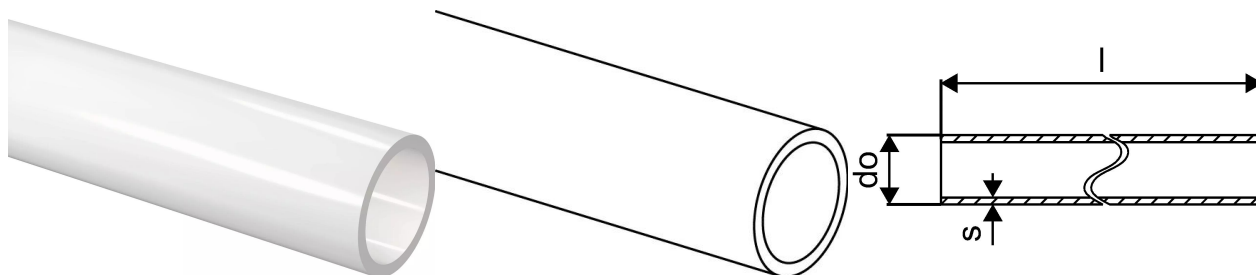

About Uponor Radi Pipe natural PN6 S

Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Radi Pipe natural PN6 S 50x4,6 6m

1008940



Technical data

| | |
|----------------------------|----------------|
| Item no EAN | 7321500018078 |
| Item no GTIN | 07321500018078 |
| Item no VVS | 087229150 |
| RSK no. | 2418233 |
| Item (unit of measurement) | m |
| Packaging Quantity 1 | 6 |
| Packaging Quantity 4 | 660 |
| Packaging GTIN PL1 | 06414905422067 |
| Packaging GTIN PL4 | 06414905662869 |
| Item Unit Length | 1000 |
| Item Unit Height | 50 |
| Item Unit Weight | 0,665 |
| Item Unit Width | 50 |

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb