


Uponor Vario B flowmeter WGF G3/4 2-8 l/min

1009142

- Made of brass

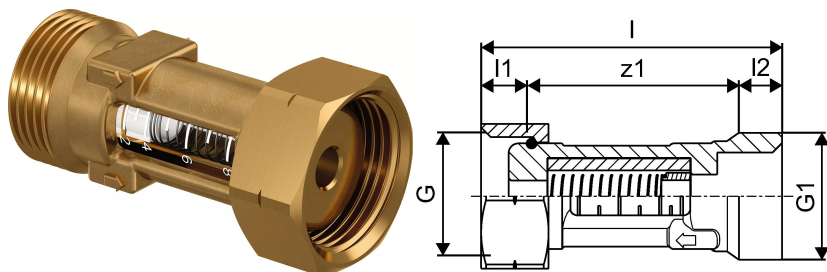

About Uponor Vario B flowmeter WGF

Specification


- Made of brass
- With integrated valves
- Connection right or left with flat sealing supply
- With lockshield valve or flowmeter for balancing and shutoff
- no primary connection to combine it with the correct accessories
- Loop connection G3/4" eurocone
- Loop distance 50 mm
- Bracket distance 210 mm

Application

- For underfloor heating and cooling
- Combineable with actuators FT 30x1,5
- Max. pressure: 6 bar at 60°C

Uponor Vario B flowmeter WGF G3/4 2-8 l/min

1009142

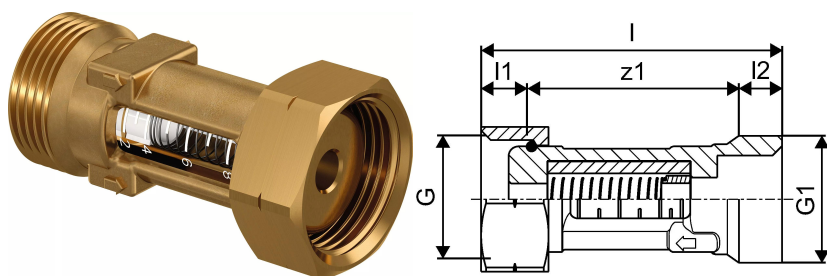

Technical data

Item no EAN	7321500030827
Item no GTIN	07321500030827
Item no VVS	046265106
RSK no.	4876088
Item no NRF	8362131
Item no LVI	2025652
Item (unit of measurement)	pce
Length (l)	63 mm
Length (l1)	10 mm
Length (l2)	9 mm
Packaging Quantity 1	12
Packaging GTIN PL1	06414905434589
Item Unit Length	29
Item Unit Height	55
Item Unit Weight	0,12
Item Unit Width	29

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb