


Uponor Vario PLUS distance set

1009215

- Manifold single segments for mixed loop connection from top and bottom

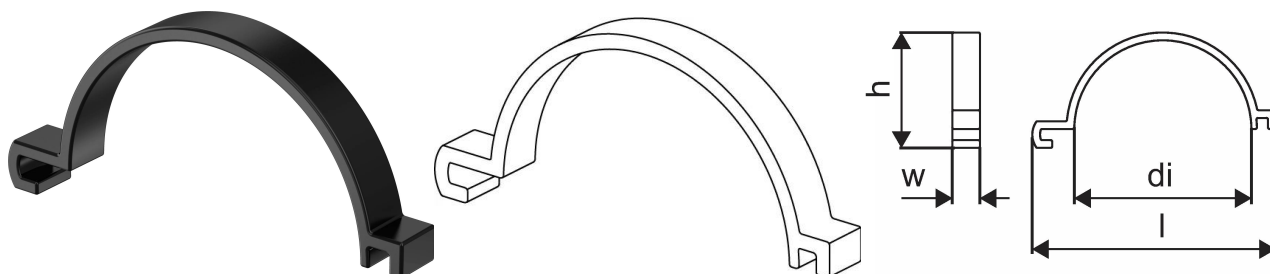

About Uponor Vario PLUS distance set

Specification

- Modular fibre glass reinforced polyamide manifold with 1,3,4,6 loops for connection with basic kit
- connection right or left with flat sealing or connection from below with optional elbowset
- supply with lockshield (LS) valve for balancing with adjusting ring or supply with Flowmeter (FM) for balancing
- shut-off and flow view
- adjusting ring for balancing without tools
- prepared places for room name labels
- return with valves and caps, prepared for actuators
- loop connection G3/4" eurocone
- loop pitch 50 mm
- header pitch 225 mm

Actuator:

- NC (normally closed) = closes without power

Application


- for underfloor heating and cooling
- combineable with actuators MT 30x1,5

Certification

- CE

Uponor Vario PLUS distance set

1009215

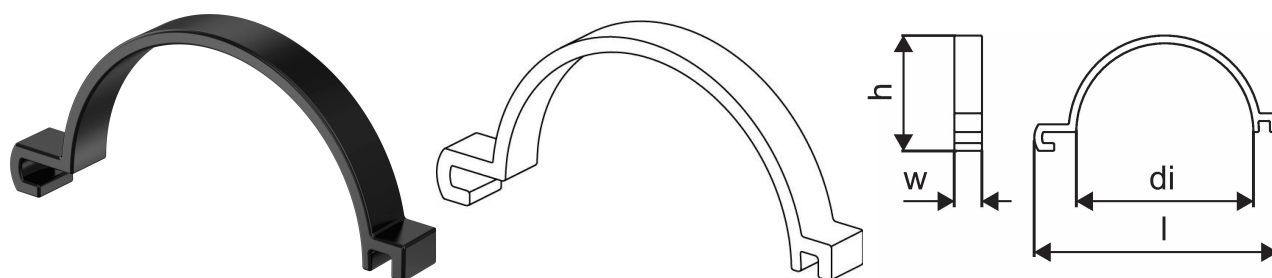

Technical data

Item no EAN	4016203841834
Item no GTIN	04016203841834
Item no VVS	087604168
RSK no.	2418977
Item no NRF	8362667
Item no LVI	2025831
Item (unit of measurement)	pce
Length (l)	220 mm
Z-measurement h	104 mm
Z-measurement w1	25 mm
Packaging Quantity 1	4
Packaging Quantity 3	40
Packaging Quantity 4	640
Packaging GTIN PL1	06414900385169
Packaging GTIN PL3	06414900385176
Packaging GTIN PL4	06414905655946
Item Unit Length	50
Item Unit Height	5
Item Unit Weight	0,046
Item Unit Width	15

Technical documents

Download documents here

UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb