


Uponor Vario S actuator NC 230V FT30x1,5

1013006

- open/closed indicator
- operation at ambient temperature of up to +60°C
- protection class: IP54

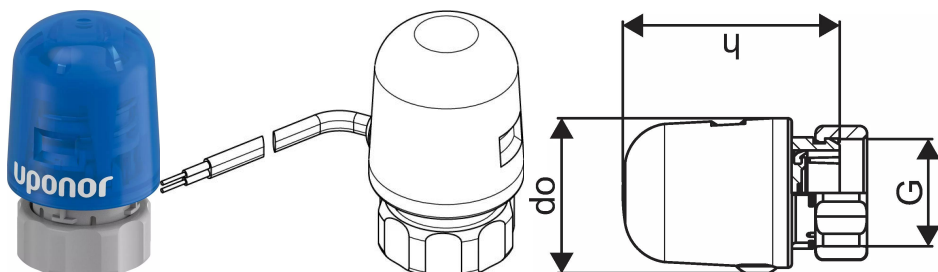

About Uponor Vario S actuator NC

Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

Uponor Vario S actuator NC 230V FT30x1,5

1013006

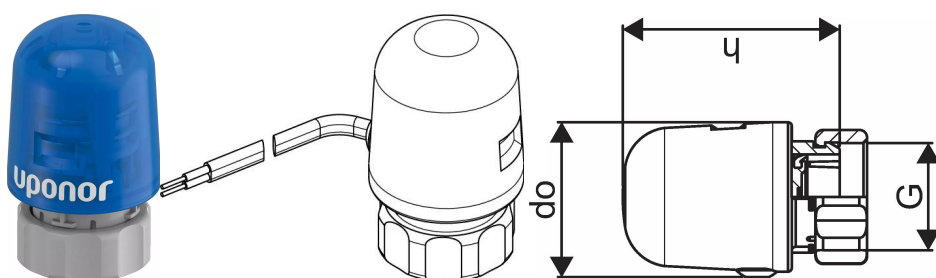

Technical data

Item no EAN	4021598002937
Item no GTIN	04021598002937
Item no VVS	466234402
Item no LVI	2025233
Item (unit of measurement)	pce
Z-measurement h	56 mm
Packaging Quantity 1	1
Packaging Quantity 3	10
Packaging Quantity 4	2000
Packaging GTIN PL1	06414905584987
Packaging GTIN PL3	06414905584994
Packaging GTIN PL4	06414905635795
Item Unit Length	40
Item Unit Height	64
Item Unit Weight	0,11
Item Unit Width	40

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb