


## Uponor Vario S actuator NC 24V FT30x1,5

**1013008**

- open/closed indicator
- operation at ambient temperature of up to +60°C
- protection class: IP54

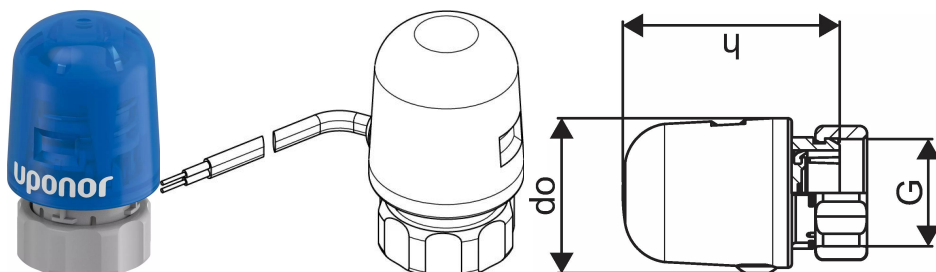

### About Uponor Vario S actuator NC

#### Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

#### Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

## Uponor Vario S actuator NC 24V FT30x1,5

1013008

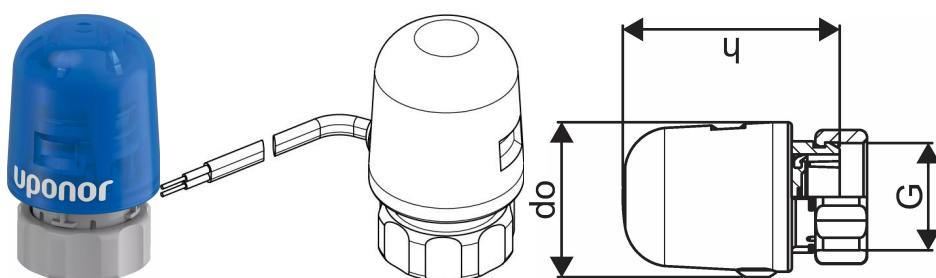

### Technical data

Item no EAN	4021598005808
Item no GTIN	04021598005808
Item no VVS	466234401
RSK no.	2989176
Item no LVI	2025234
Item (unit of measurement)	pce
Z-measurement h	56 mm
Packaging Quantity 1	1
Packaging Quantity 3	10
Packaging Quantity 4	2000
Item Replacement 1	1141677
Packaging GTIN PL1	06414905585014
Packaging GTIN PL3	06414905585021
Packaging GTIN PL4	06414905635764
Item Unit Length	40
Item Unit Height	63
Item Unit Weight	0,11
Item Unit Width	40

### Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)